
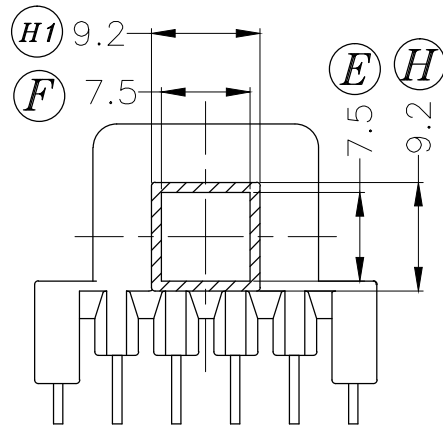
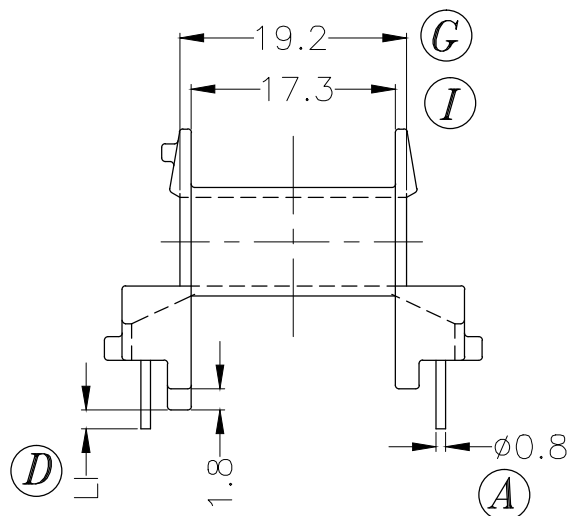
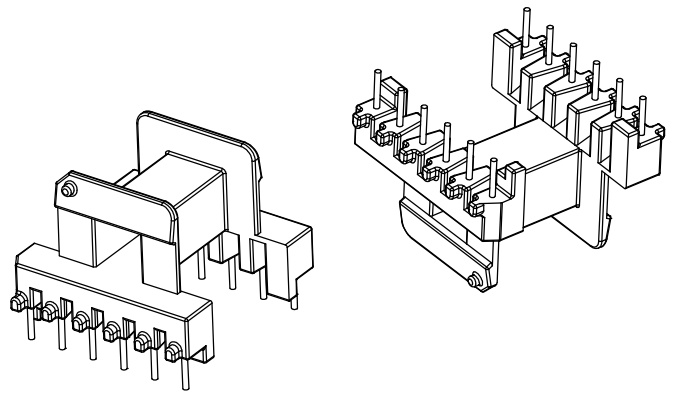
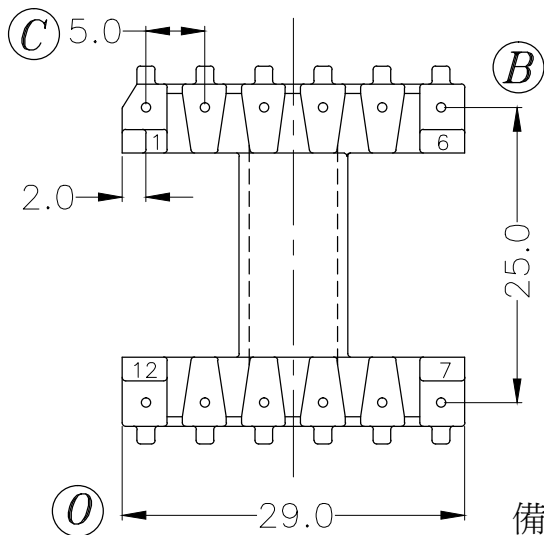
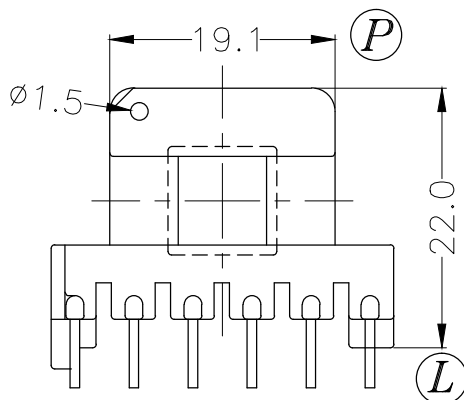


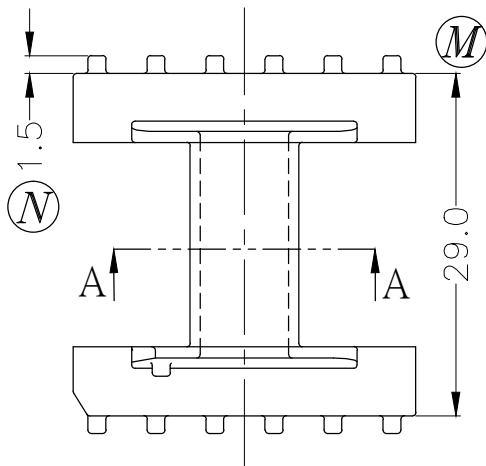

SECTION A-A

備注：

1.未定義R角R=0.3

2.PIN針不得有氧化,刮伤变形及异物于表面上

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	图框更换		18.07.20				

DRAWN & DRAFTED BY	王小雲	TOLERANCES	ANGLE:	TITLE:			
CHECKED & APPROVED BY		0<L ≤4 ±0.1 4<L ≤16 ±0.2 16<L ≤63 ±0.3	±1°	T-H BOBBIN EE-30H			
		pin pitch ±0.2	UNIT:	BOBBIN MATERIAL:		UL REC.	
			MM	T375J		UL 94V-0	
			ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:	
			ZZ	CP线		2.0KG	
				DATE:	DRAWING NO.	REV.	
				JUL.20.2018	P-3002-1	1	