

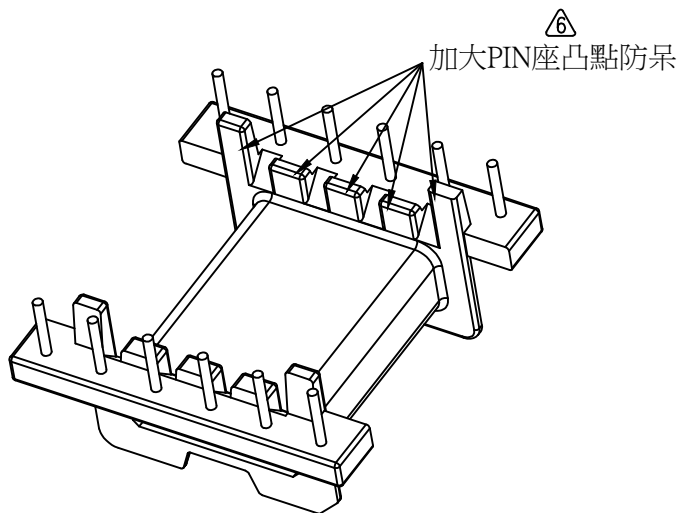
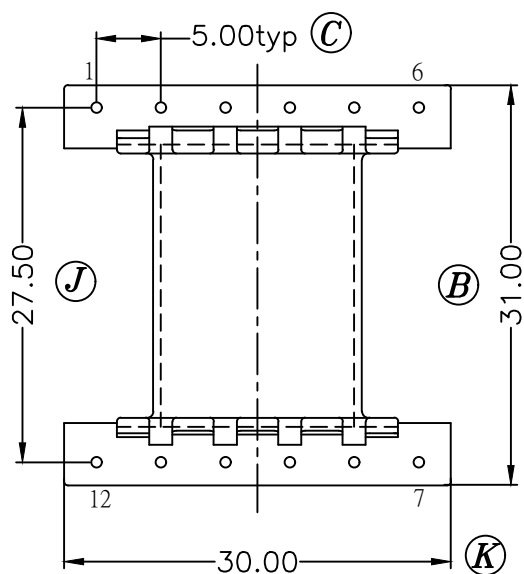
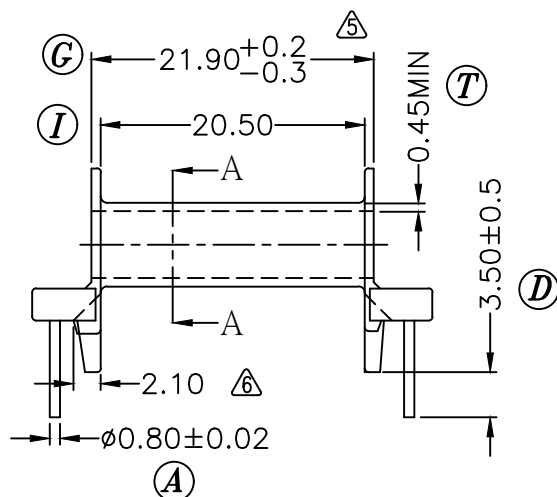
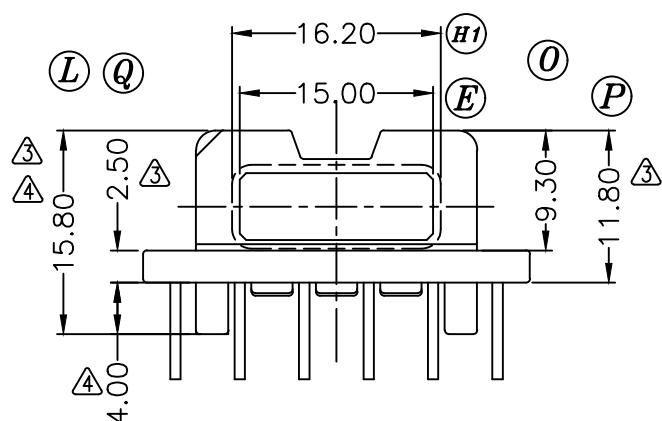


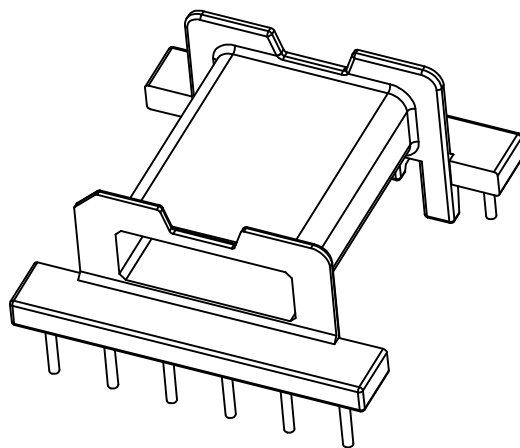

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(L):14.8=>15.8;(M):3.5=>4.5		5	(G)加嚴管控尺寸公差21.9±0.3=>21.9+0.2/-0.3 6	
2	(D):5.5±0.3=>3.3±0.3		6	加大PIN座凸點防呆 6	
3	(Q)2.0=>2.5;(P)11.3=>11.8;(L)15.8=>16.3 3		7	變更公差6.5+/-0.2-->6.5+0.2/-0.1 7	11.01.18
4	(M):4.5=>4.0;(L)16.3=>15.8 4				

DRAWN & DRAFTED BY	高士元	TOLERANCES	ANGLE: ±1°	TITLE: T-H BOBBIN EFD-30
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	UNIT: MM	BOBBIN MATERIAL: PM9820
		pin pitch ±0.2	ORIGIN: DG	PIN MATERIAL: CP WIRE
				PIN TENSION LOAD: 1.5KG MIN
				DATE: AUG.28.09
				DRAWING NO. P-3004-1
				REV. 7

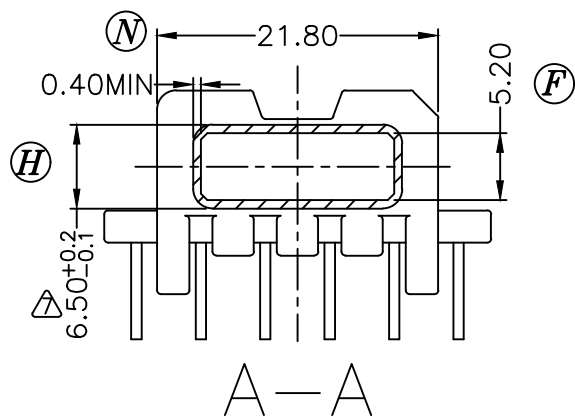

PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546

