

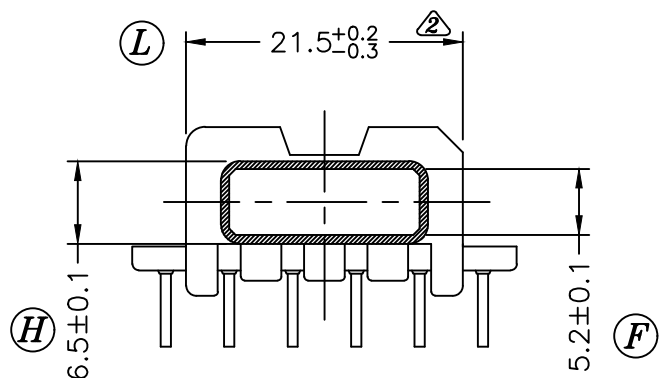
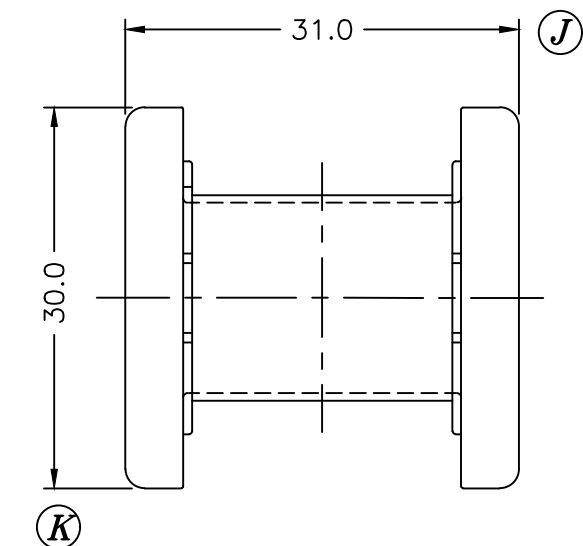
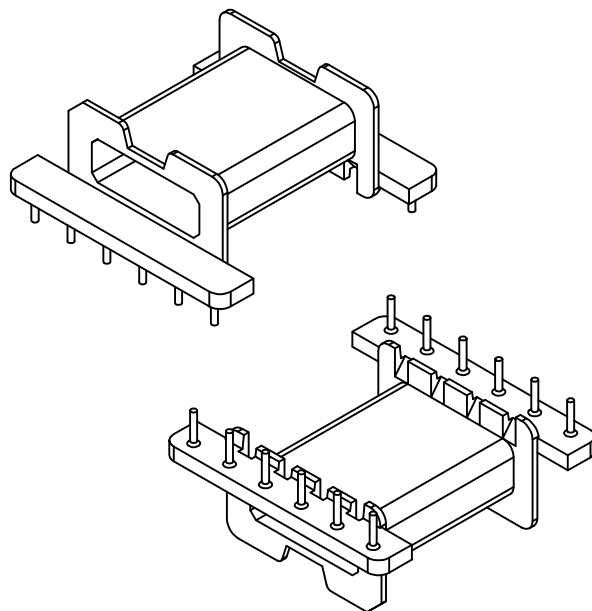
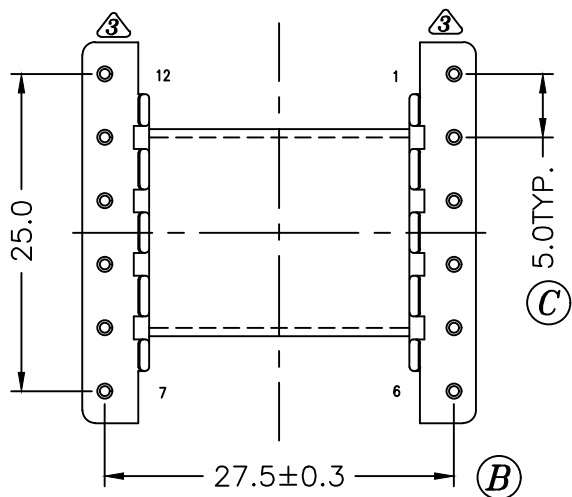


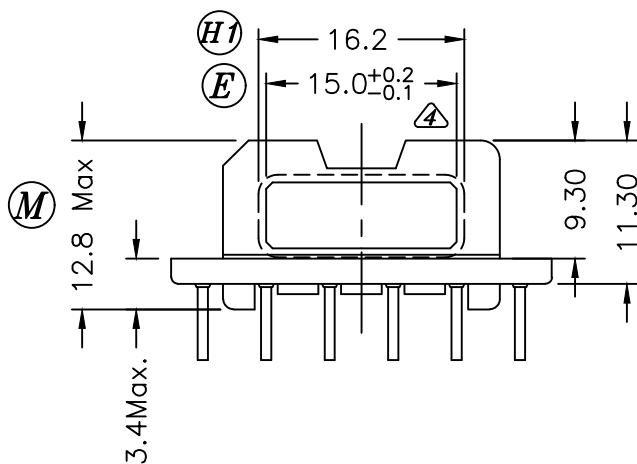

SEC. A-A

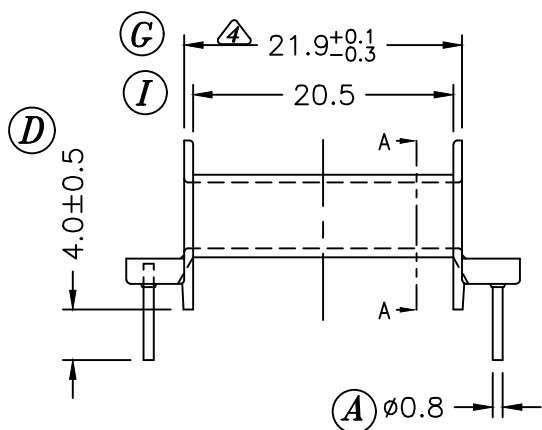

| REV. | REVISIONS REC.                  | DATE     | REV. | REVISIONS REC. | DATE     |
|------|---------------------------------|----------|------|----------------|----------|
| 1    | CHANGE DRAEING,ADD R ANGLE      | '08.4.20 | 4    | 修改尺寸公差. ④      | '20.3.13 |
| 2    | 變更尺寸公差 21.5--->21.5 +0.2/-0.3 ② | '16.6.20 |      |                |          |
| 3    | 按照實物修改過線槽,凸點及PIN座內側4個角減膠. ③     | '20.2.14 |      |                |          |

|                                                                                                                                                                |              |              |                   |                                                                                     |                             |                                |           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|-------------------|-------------------------------------------------------------------------------------|-----------------------------|--------------------------------|-----------|
| DRAWN &<br>DRAFTED BY                                                                                                                                          | HUANG JIN YU | TOLERANCES   |                   | ANGLE:<br>±1°                                                                       | TITLE:<br>T-H BOBBIN EFD-30 |                                |           |
| CHECKED &<br>APPROVED BY                                                                                                                                       |              | 0<L≤4 ±0.1   | pin pitch<br>±0.2 | UNIT:<br>MM                                                                         | BOBBIN MATERIAL:<br>PM9820  | UL REC.<br>UL 94V-0            |           |
|                                                                                                                                                                |              | 4<L≤16 ±0.2  |                   | ORIGIN:<br>DG                                                                       | PIN MATERIAL:<br>CP WIRE    | PIN TENSION LOAD:<br>1.0KG MIN |           |
|                                                                                                                                                                |              | 16<L≤63 ±0.3 |                   |                                                                                     |                             |                                |           |
|  PIN SHINE INDUSTRIAL CO.,LTD.<br>TEL:886-2-22990545      FAX:886-2-22990546 |              |              |                   |  | DATE:<br>DEC.20 '2004       | DRAWING NO.<br>P-3004-6        | REV.<br>4 |