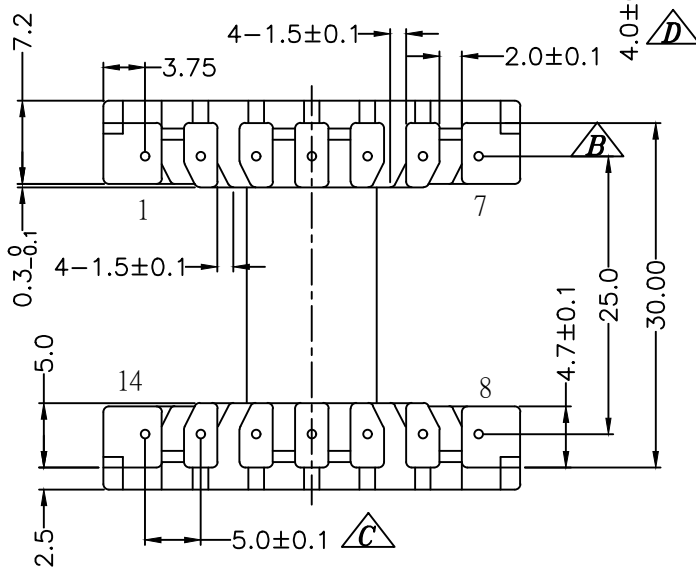
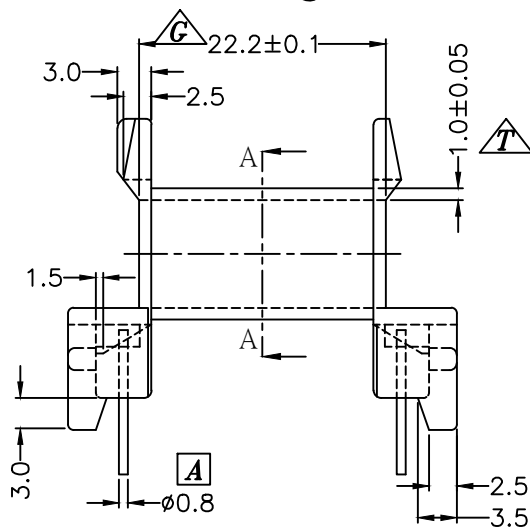
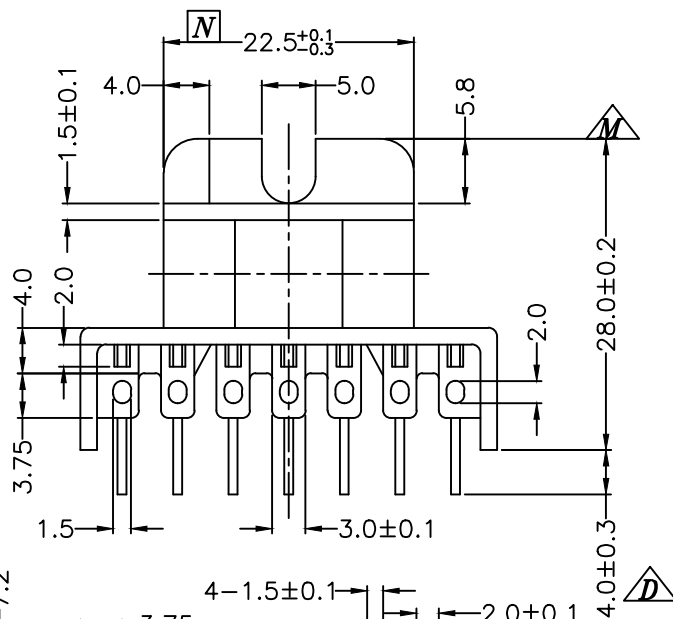
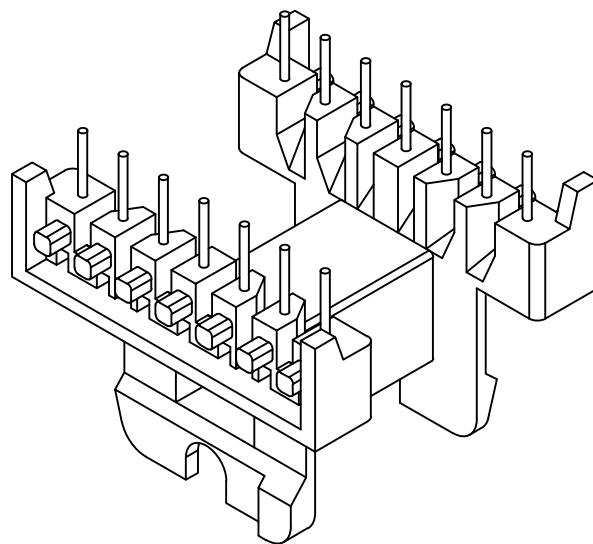
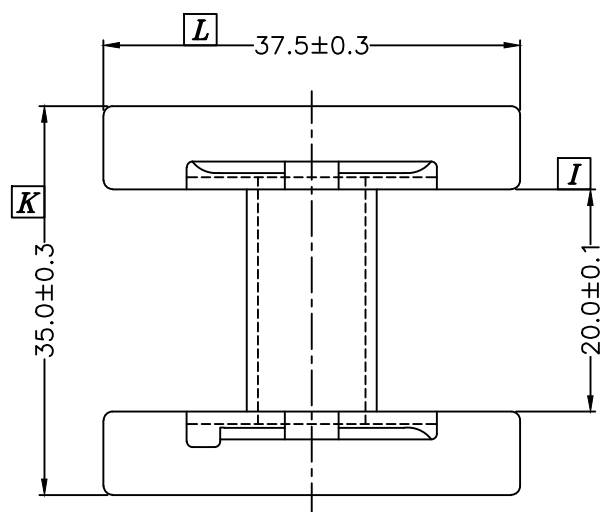


SECTION A-A

備註:Pin推拉力須在焊前1.5KG，焊后2.0 KG以上;

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE

DRAWN & DRAFTED BY	Lu Peng	TOLERANCES		ANGLE: ±1°	TITLE: EE-32 BOBBIN		
		X.X X.XX 0~10 ±0.2 ±0.08 10~20 ±0.3 ±0.15 >20 ±0.5 ±0.25	pin pitch ±0.2				
CHECKED & APPROVED BY				UNIT: MM	BOBBIN MATERIAL: PM 9630(BK)	UL REC. UL 94V-0	
				ORIGIN: DG	PIN MATERIAL: CP WIRE 3/4H	PIN TENSION LOAD: See Note	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					DATE: Jun.26th.2012	DRAWING NO. P-3219	REV. 0