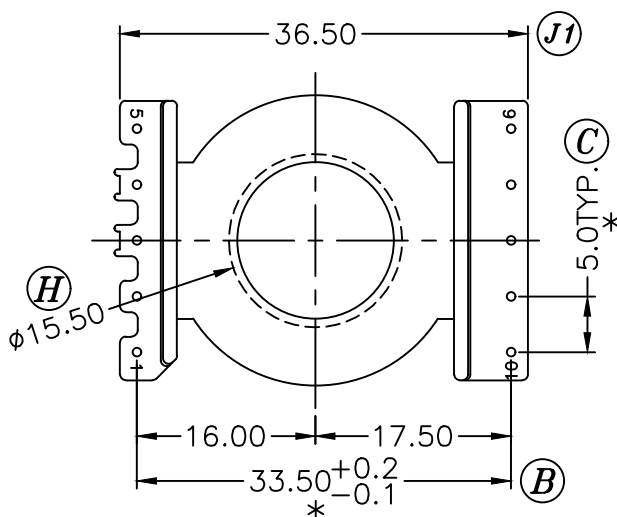
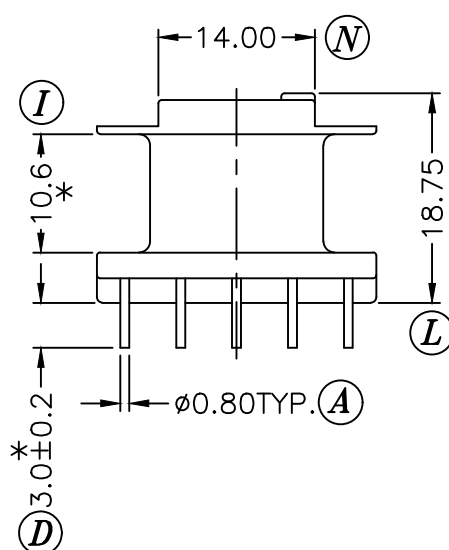
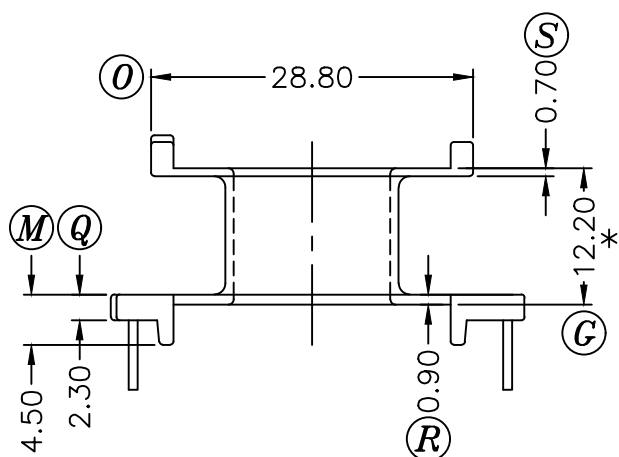
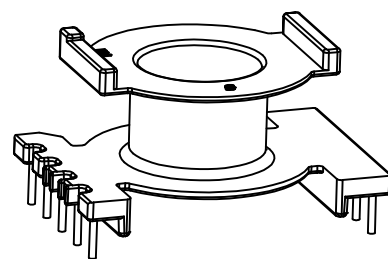
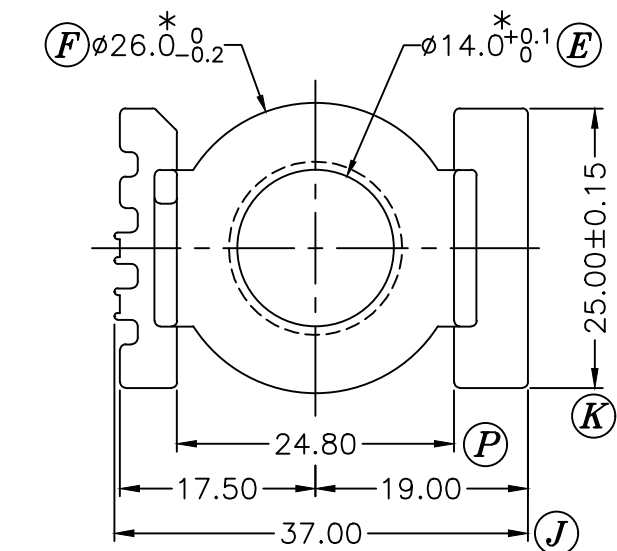



REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(F): $\phi 26.0+0/-0.15 \rightarrow \phi 26.0+0/-0.2$	'03.03.05	4	(E): $\phi 14.0+0.1/-0.05 \rightarrow \phi 14.0+0.1/-0$	'05.03.09
2	(B): $33.5 \pm 0.2 \rightarrow 33.5+0.2/-0.1$	'03.05.30			
3	(E): $\phi 14.0+0.1/-0 \rightarrow \phi 14.0+0.1/-0.05$	'05.01.11			

DRAWN & DRAFTED BY	WU FANG	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	pin pitch ±0.2	±1°	T-H BOBBIN POT-33/19		
CHECKED & APPROVED BY				UNIT:	BOBBIN MATERIAL:	UL REC.	
				MM	PHENOLIC PM9820	UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				SZ	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
					MAR.09 '2005	P-3309-1	4