
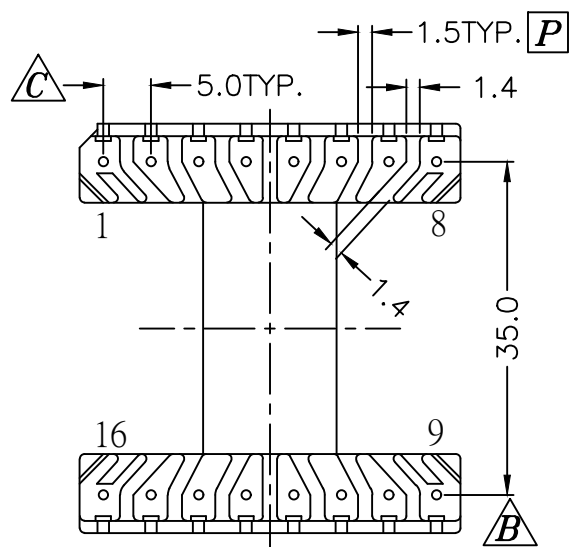
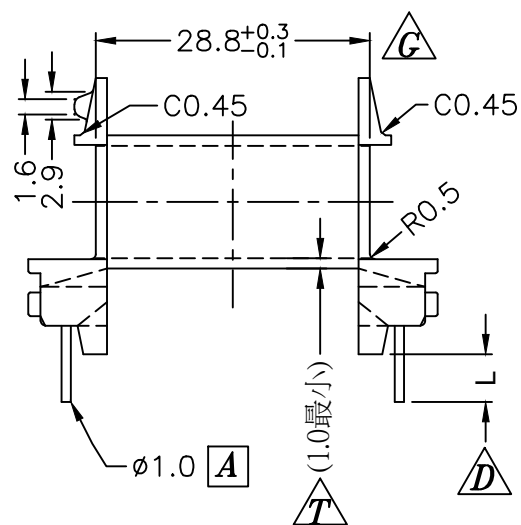
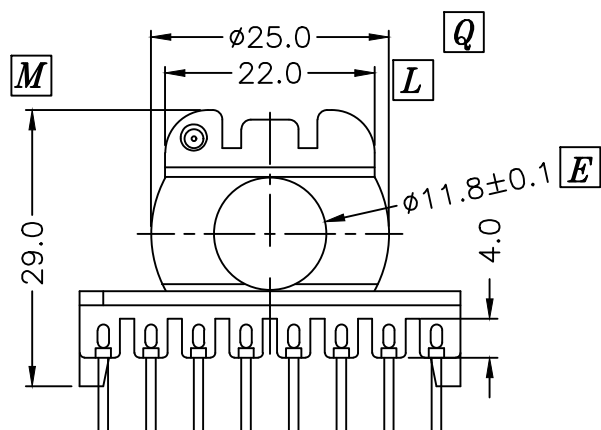
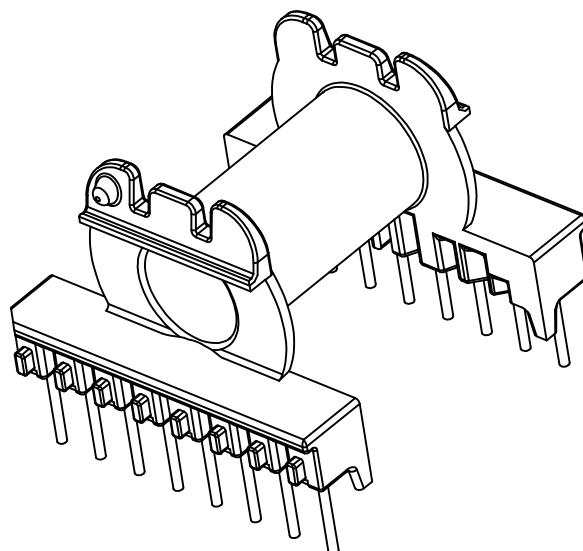


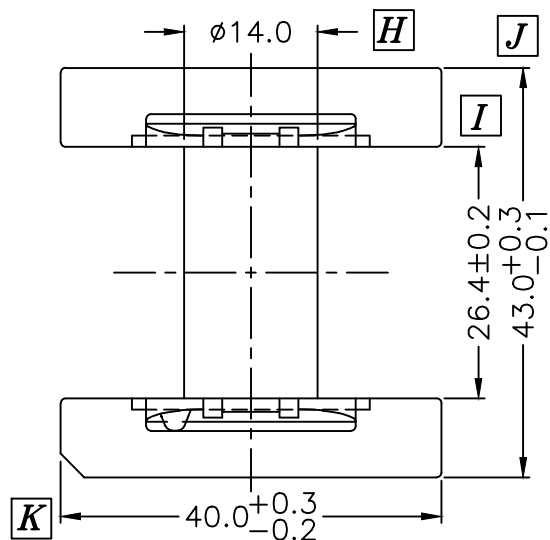


備註:

1.電鍍規格：Sn100% 5~10um
NI 1.25~2.5um

P-3508-4是在P-3508的基礎上新增
T375HF材質生產

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE

DRAWN & DRAFTED BY	ZHOU KANG	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EER-35H		
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:		UL REC.
		16<L≤63 ±0.3	MM	T375HF		UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:
				DG	1/2 CP WIRE		2.0KG MIN
					DATE:	DRAWING NO.	REV.
					Apr.03.2023	P-3508-4	0



PIN SHINE INDUSTRIAL CO., LTD.
TEL:886-2-22990545 FAX:886-2-22990546