

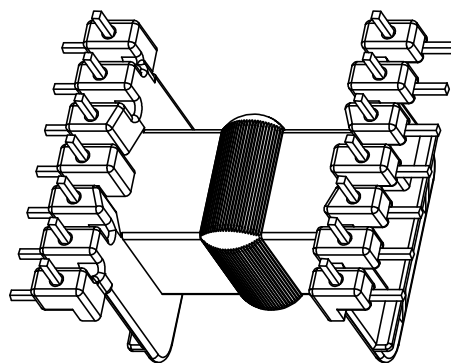
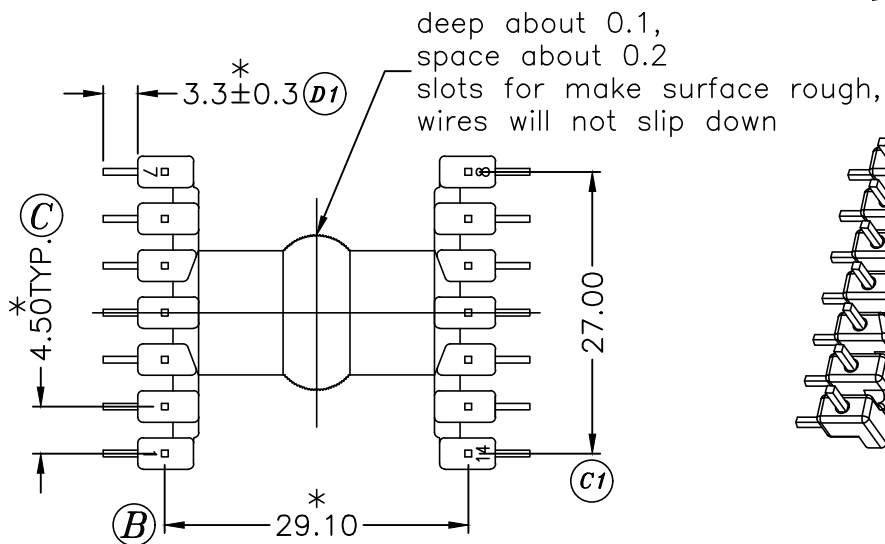
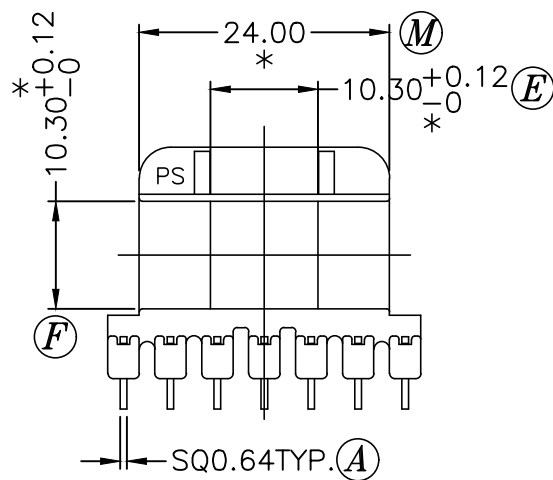
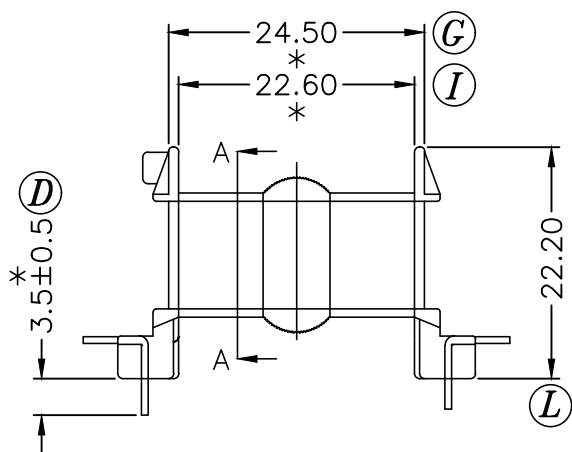


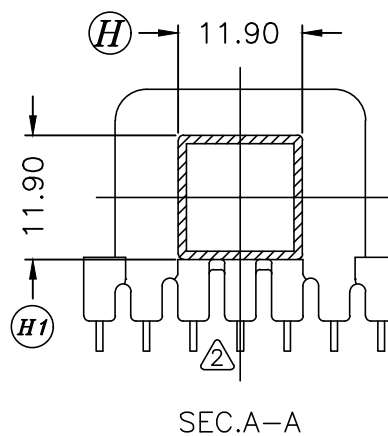

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(E):10.3-→10.3 ^{+0.12} ₀	'04.09.11			
2	THE WIRE GROOVE MODIFIED SEE MARK:	'04.09.28			
3	UPDATE THE DRAWING.	'08.07.07			

DRAWN & DRAFTED BY	HOU YI MIN	TOLERANCES		ANGLE: $\pm 1^\circ$	TITLE: L TYPE BOBBIN EF-35		
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	pin pitch ±0.2	UNIT: MM	BOBBIN MATERIAL: PA66 70G33L	UL REC. UL 94HB	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN: SZ	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN	
					DATE: DEC.27 '2003	DRAWING NO. P-3532-1	REV. 3

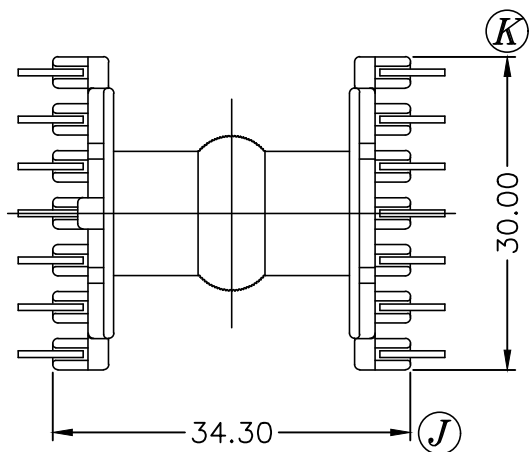

PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545

FAX:886-2-22990546

