

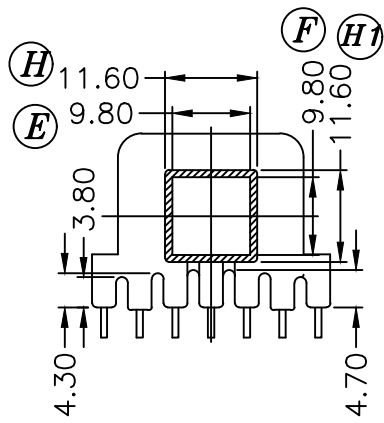
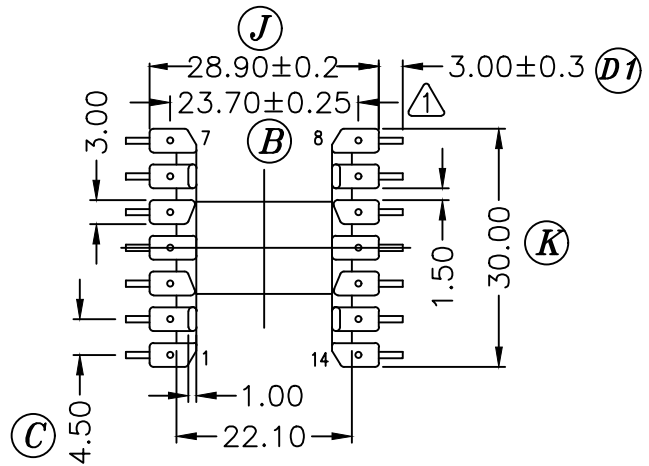

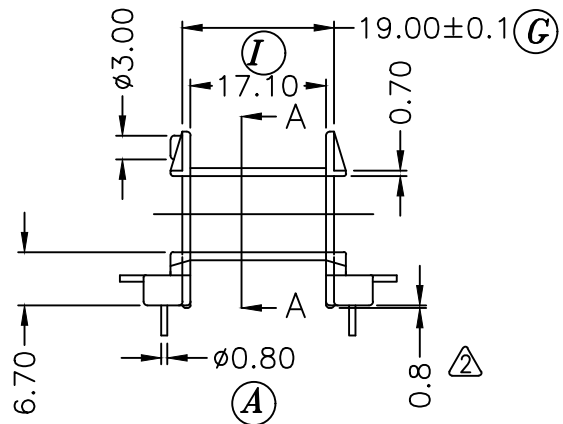


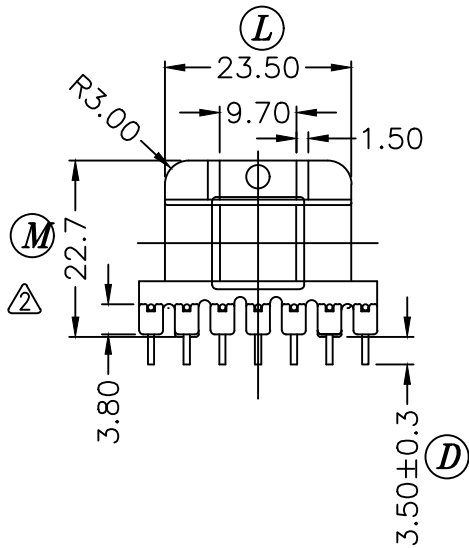

SEC. A-A

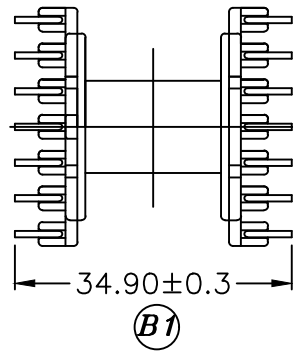

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	① MODIFY ② 23.7 TOLERANCE: $\pm 0.3 \rightarrow \pm 0.25\text{mm}$		'05.10.07	3	CHANGE THE PLACE ON THE PIN		'07.04.30
2	② MODIFY ③ DIM: 22.2 $\rightarrow$ 22.7mm		'05.11.11				
	③ MODIFY ④ DIM: 0.3 $\rightarrow$ 0.8mm						

DRAWN & DRAFTED BY	LUO SHU HAU	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE:	T-H BOBBIN EE-35		
CHECKED & APPROVED BY	JONH RONG	$0 < L \leq 4 \pm 0.1$ $4 < L \leq 16 \pm 0.2$ $16 < L \leq 63 \pm 0.3$	pin pitch ± 0.2	UNIT: MM	BOBBIN MATERIAL: PBT 4130	UL REC. UL 94V-0	
ORIGIN: DG				PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN		
PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				DATE: NOV.07'2004	DRAWING NO. P-3537	REV. 3	