

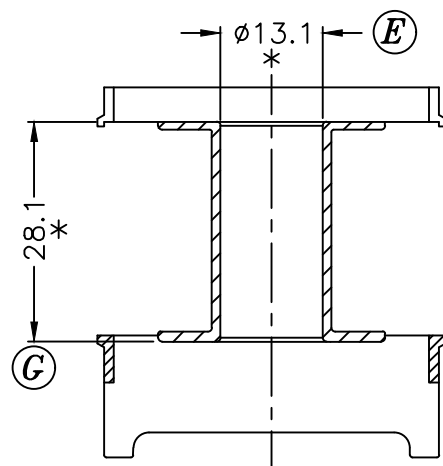
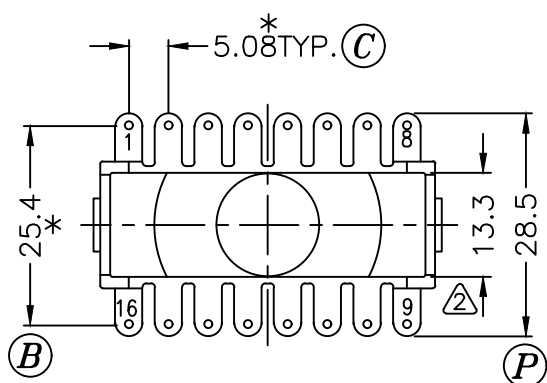
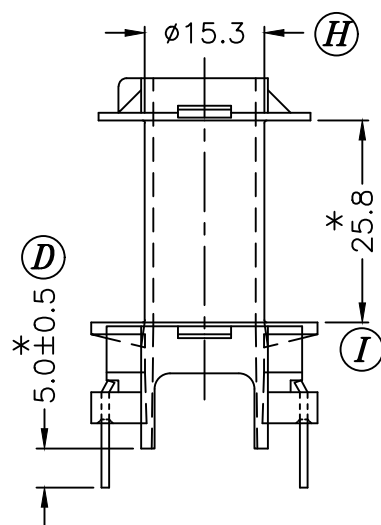
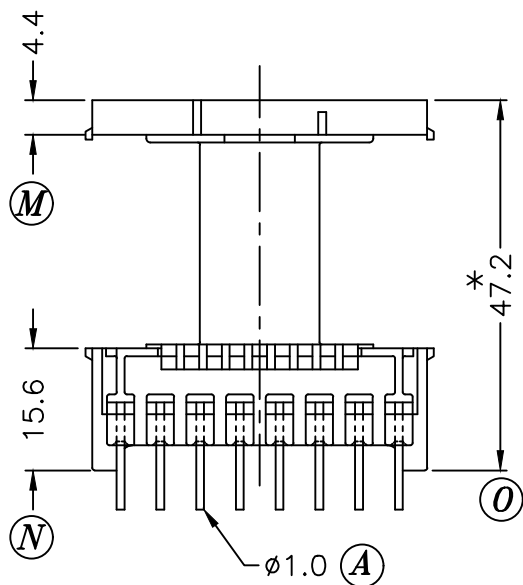
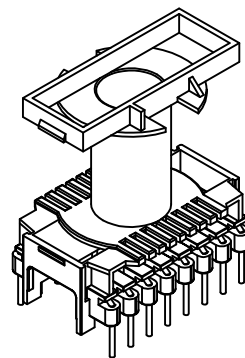


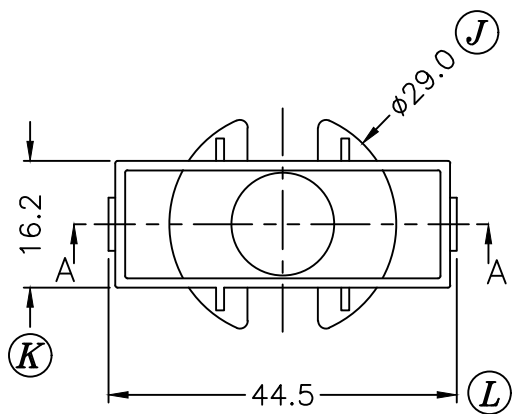

SEC.A-A

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	MODIFY DIM (N) FROM 15.3->15.6				
2	SHAPE MODIFIED: ; UPDATE THE DRAWING.	'09.07.30			

DRAWN & DRAFTED BY	HOU YI MIN	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN ETD-39		
CHECKED & APPROVED BY	4<L≤16 ±0.2	UNIT:		BOBBIN MATERIAL:	UL REC.		
	16<L≤63 ±0.3					MM	PET FR530
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				SZ DG	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
					JUL.21 '2001	P-3905	2



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546