

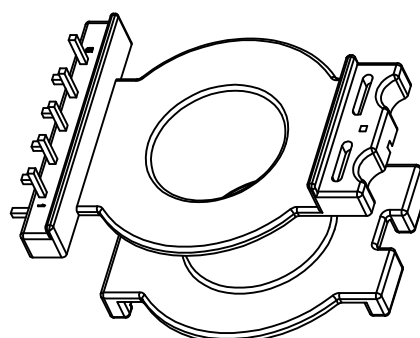
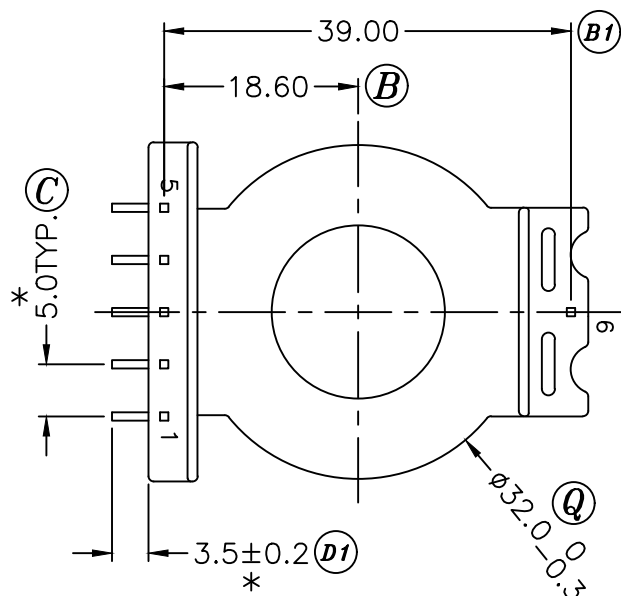
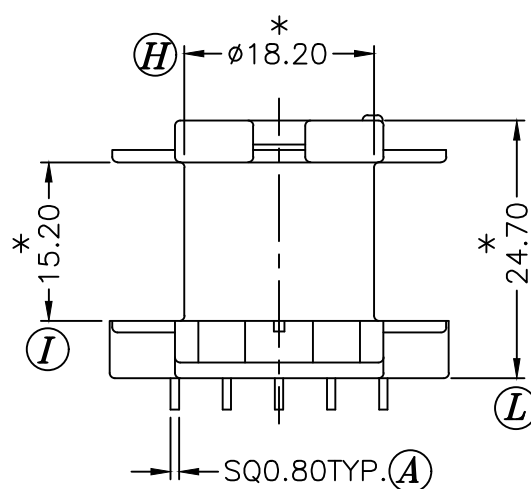
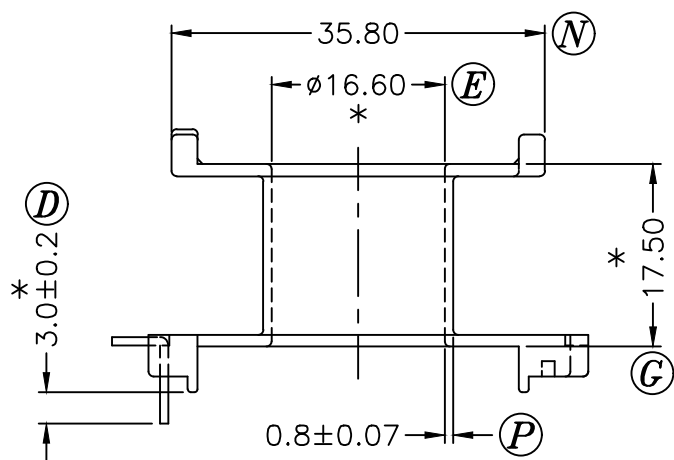


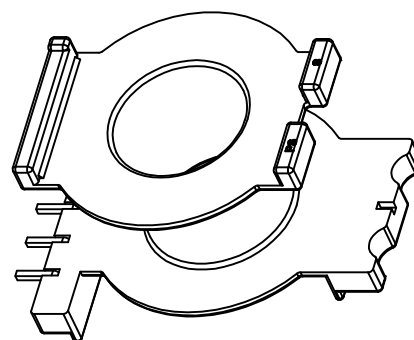

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
3	(N):37.0->35.8	'04.02.26	6	PIN TENSION LOAD CHANGE 2.0KG	'04.04.13
4	ADD THE PIN (B1)	'04.03.10	7	(J):41.95->42.15	'08.10.13
5	ADD DIM (O),(P),(Q).	'04.04.02	8	增加材質T375HF	'10.29.19

DRAWN & DRAFTED BY	BAI GUANG RUN	TOLERANCES		ANGLE:	TITLE:	
		0<L≤4 ±0.1	pin pitch	±1°		
CHECKED & APPROVED BY		4<L≤16 ±0.2	±0.2	UNIT:	BOBBIN MATERIAL:	UL REC.
		16<L≤63 ±0.3		MM	PHENOLIC CP-J-8800/T375HF	UL 94V-0
ORIGIN:				SZ	PIN MATERIAL:	PIN TENSION LOAD:
					CP WIRE	2.0KG MIN
					DATE:	DRAWING NO.
					10.29 '2019	P-4010
						REV.
						8

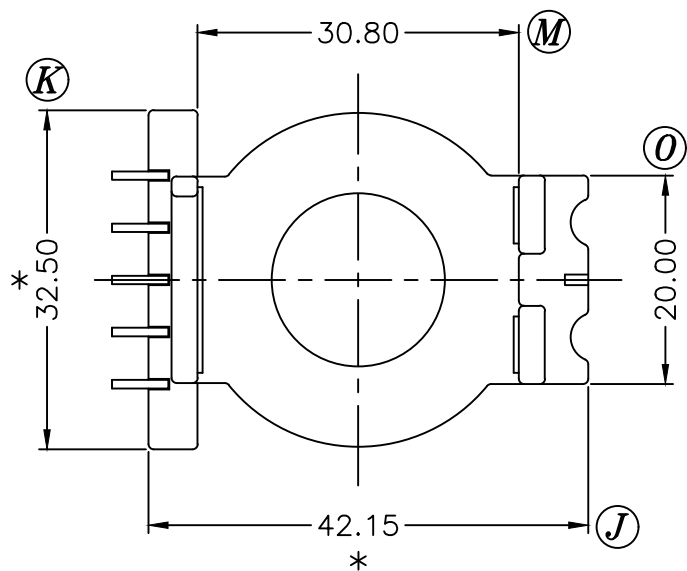

PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546