
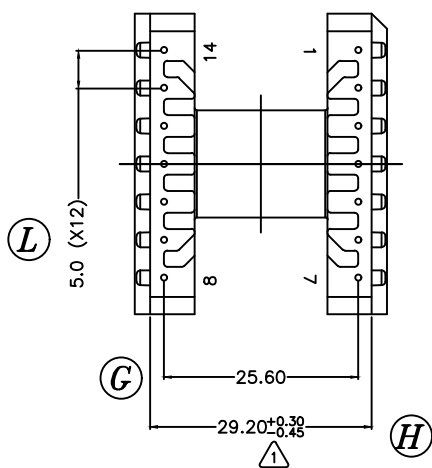
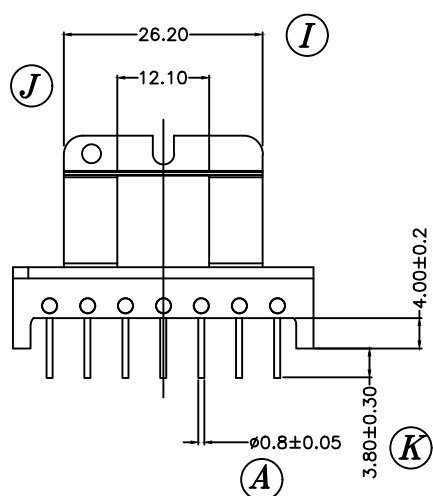
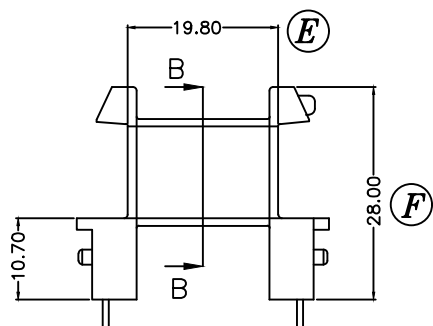

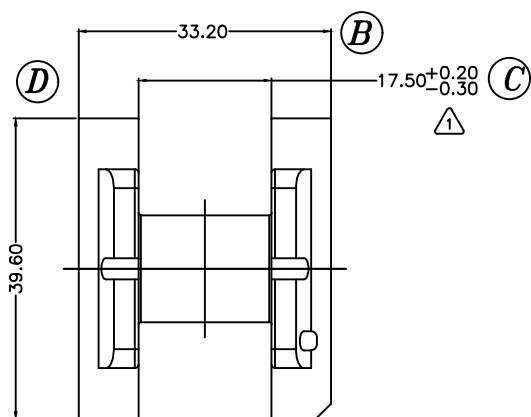


SEC B-B



備注：△

- 1.成品保存條件：溫度<38℃,濕度<80%.保存期限半年.
- 2.耐壓條件：3.5KV,5MA,3S
- 3.此為東電化蘭達專用圖面

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	放寬尺寸公差	△1	10.12.02				
2	增加備註	△2	11.04.18				

DRAWN & DRAFTED BY	肖鵬	TOLERANCES	ANGLE: ±1°	TITLE: T-H BOBBIN EE-40			
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	pin pitch ±0.2	UNIT: MM	BOBBIN MATERIAL: PM 9820 BK	UL REC. UL 94V-0	
ORIGIN: DG				PIN MATERIAL: CP WIRE 0.8	PIN TENSION LOAD: 2.0KG MIN		
DATE: FEB.16 '2004				DRAWING NO. P-4011		REV. 2	



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546

