

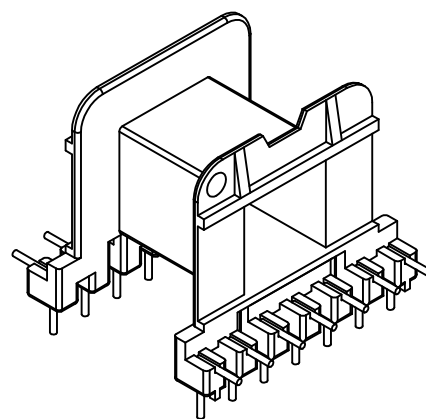
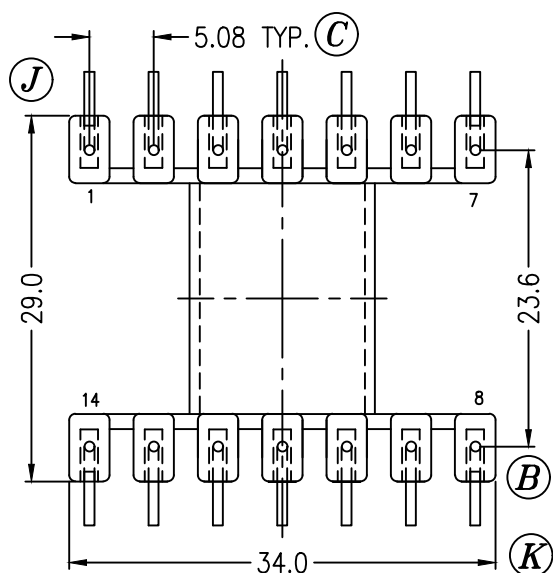
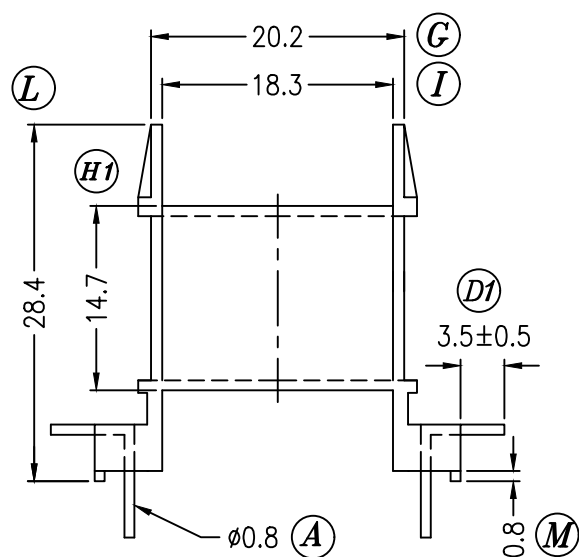
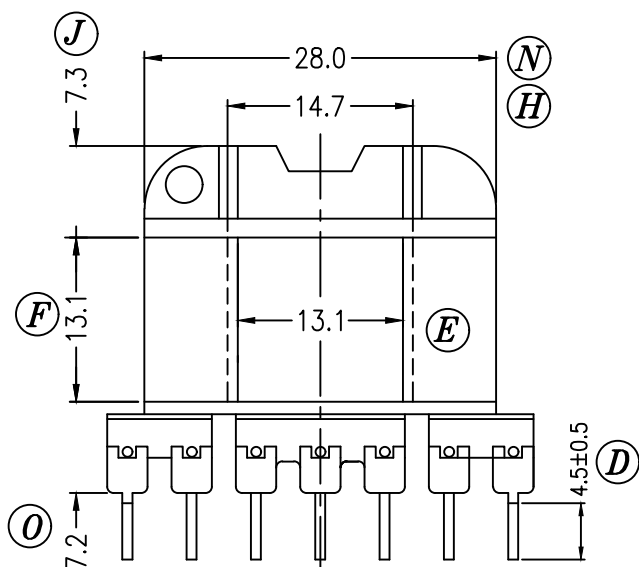


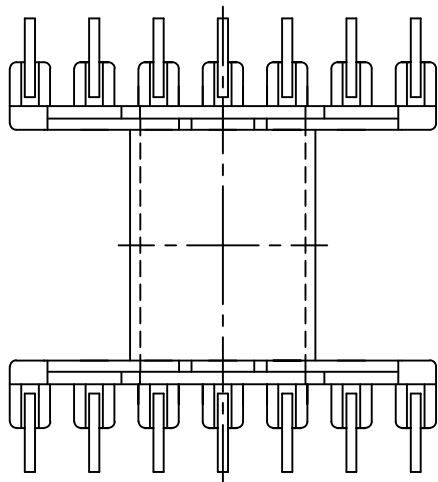

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	(K); 28.9→28.0 (O): 29.1→29.0 (P): 33.8→34.0			4	UPDATE DRAWING		'07.06.27
2	CHANGE (D) TO 5.0±0.5.			5	UPDATE UL REC (UL 94V-0→UL HB)		'17.09.20
3	UPDATE DRAWING		'06.07.03	6	CANCEL (D) :5.0±0.5.		'18.10.26

DRAWN & DRAFTED BY	YE ZHAN CHAO	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	BOBBIN EI-41		
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:	UL REC.	
		16<L≤63 ±0.3		MM	NYLON (70G33L+GLASS30%)	UL HB	
				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				DG	CP WIRE	1.0KG MIN.	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					DATE:	DRAWING NO.	REV.
					MAR.07'1998	P-4101	6



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546

