

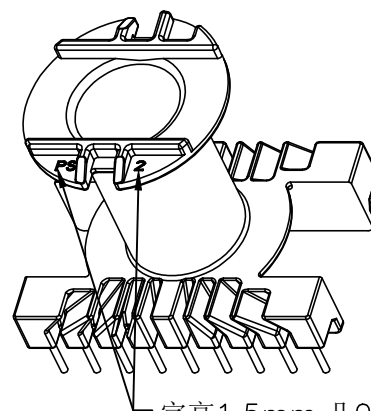
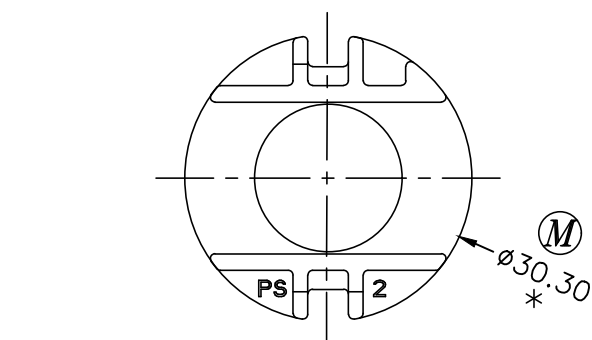
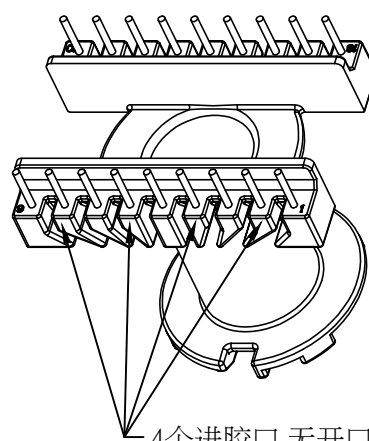
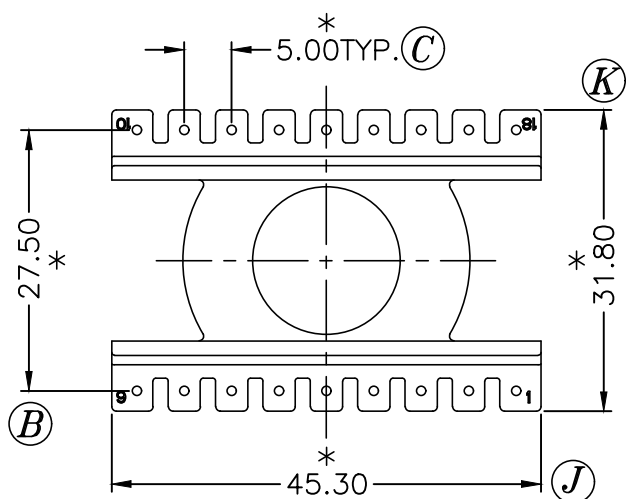


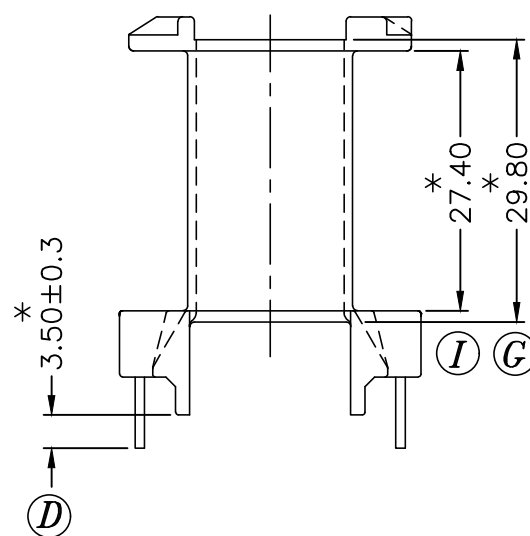


字高1.5mm,凸0.05mm

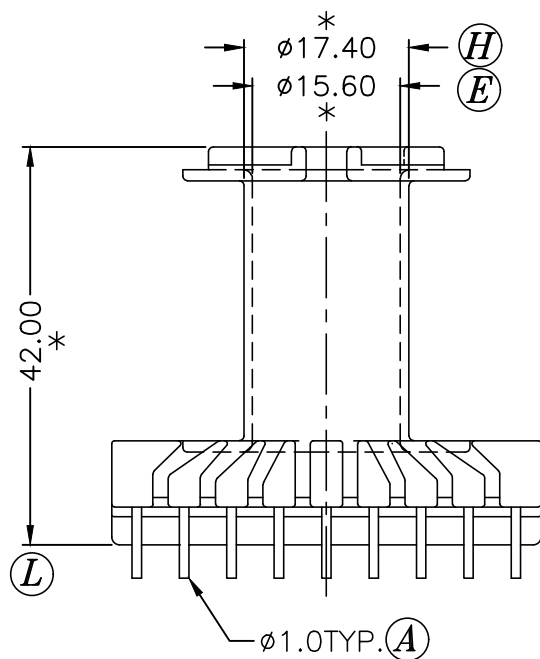

4个进胶口,无开口,后期磨水口

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	新增9823材質		03/27-20				
2	新增T375HF材質		07/06-20				

DRAWN & DRAFTED BY	GAO TENG	TOLERANCES		ANGLE:	TITLE:		
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	pin pitch ±0.2	±1°	T-H BOBBIN EER-42/15		
				UNIT:	BOBBIN MATERIAL:	UL REC.	
				MM	PHENOLIC PM9820/9823/T375HF	UL 94V-0	
				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				SZ	CP WIRE	2.0KG MIN	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					DATE:	DRAWING NO.	REV.
					07.06 '2020	P-4223	2



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546