
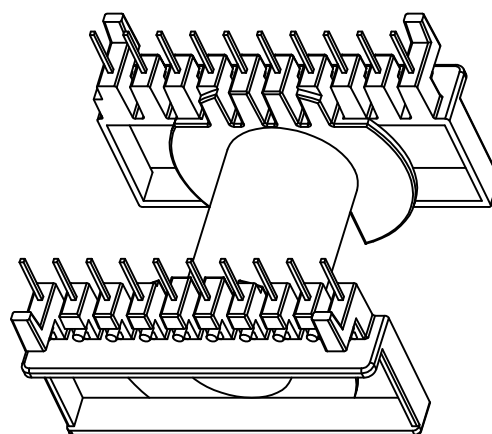
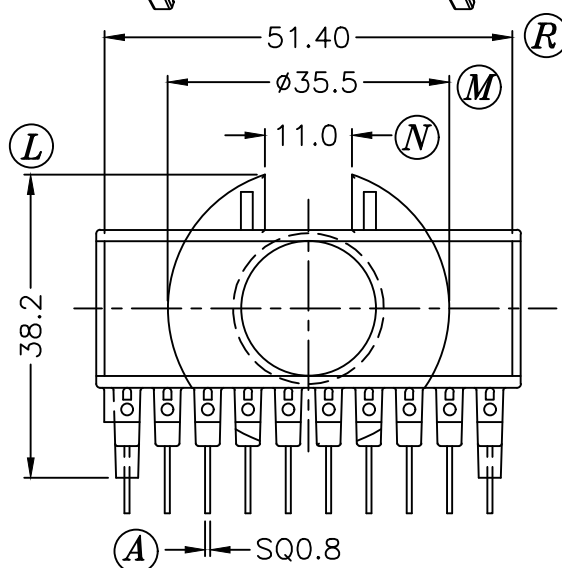
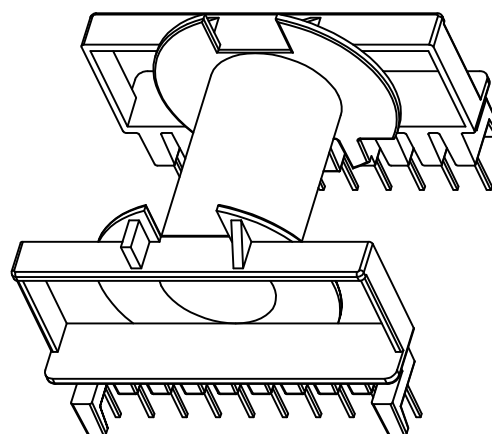
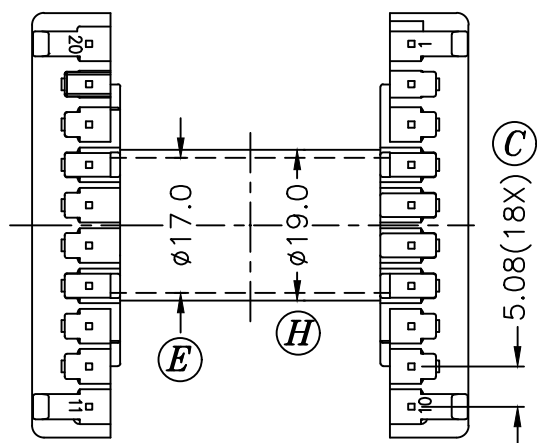
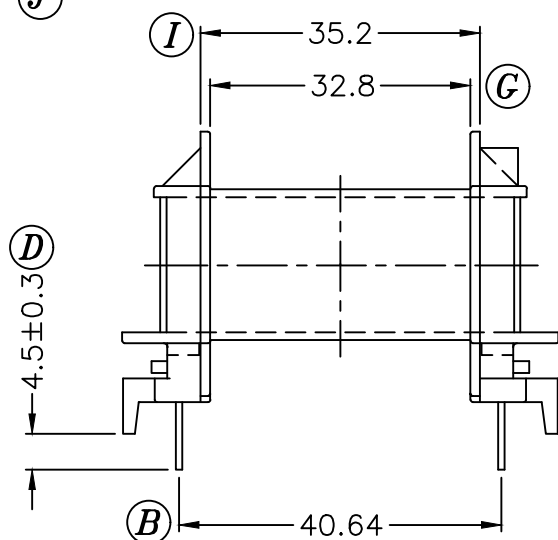
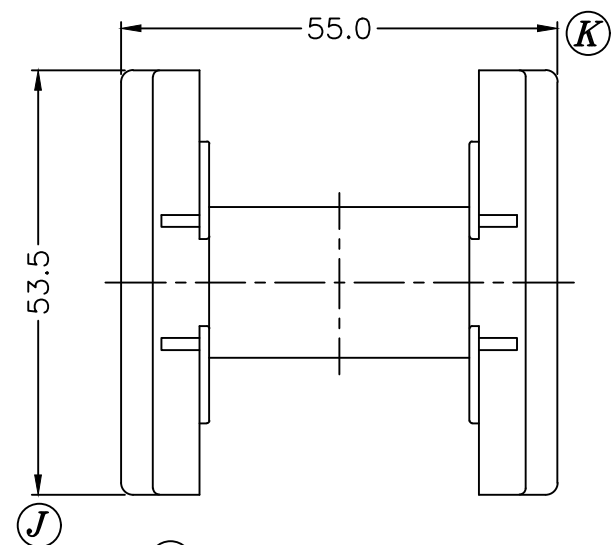




| REV. | REVISIONS                                            | REC. | REV. | REVISIONS | REC. |
|------|------------------------------------------------------|------|------|-----------|------|
| 1    | ADD (R), PIN TENSION LOAD 1.5 ->2.0; UPDATE DRAWING. |      |      |           |      |
|      |                                                      |      |      |           |      |
|      |                                                      |      |      |           |      |

|                                                                                                                                                                  |          |              |                   |                                                                                     |                             |                                |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------|-------------------|-------------------------------------------------------------------------------------|-----------------------------|--------------------------------|-----------|
| DRAWN &<br>DRAFTED BY                                                                                                                                            | CHEN LIN | TOLERANCES   |                   | ANGLE:                                                                              | TITLE:<br>T-H BOBBIN ETD-49 |                                |           |
|                                                                                                                                                                  |          | 0<L≤4 ±0.1   | pin pitch<br>±0.3 | UNIT:                                                                               |                             |                                |           |
| CHECKED &<br>APPROVED BY                                                                                                                                         |          | 4<L≤16 ±0.2  |                   | MM                                                                                  | BOBBIN MATERIAL:            | UL REC.<br>UL 94V-0            |           |
|                                                                                                                                                                  |          | 16<L≤63 ±0.3 |                   | ORIGIN:                                                                             | PET FR530                   | PIN MATERIAL:                  |           |
|  <b>PIN SHINE INDUSTRIAL CO.,LTD.</b><br>TEL:886-2-22990545 FAX:886-2-22990546 |          |              |                   | SZ                                                                                  | CP WIRE                     | PIN TENSION LOAD:<br>2.0KG MIN |           |
|                                                                                                                                                                  |          |              |                   |  | DATE:<br>APR.10 '2003       | DRAWING NO.<br>P-4902          | REV.<br>1 |