
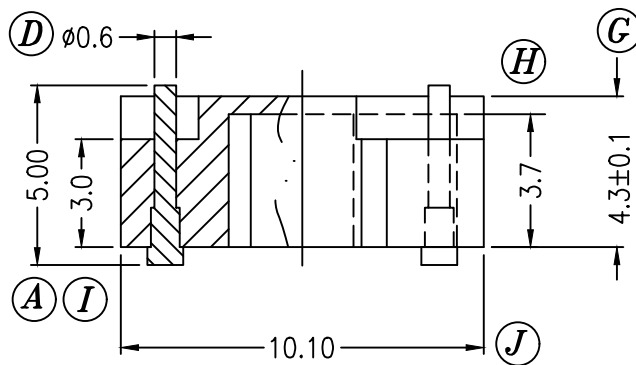
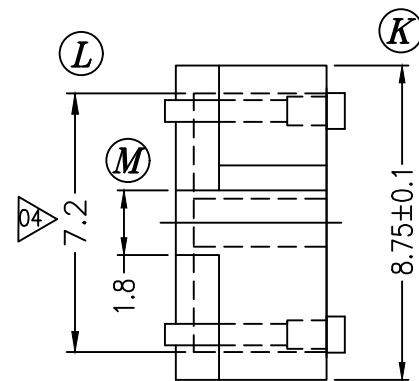
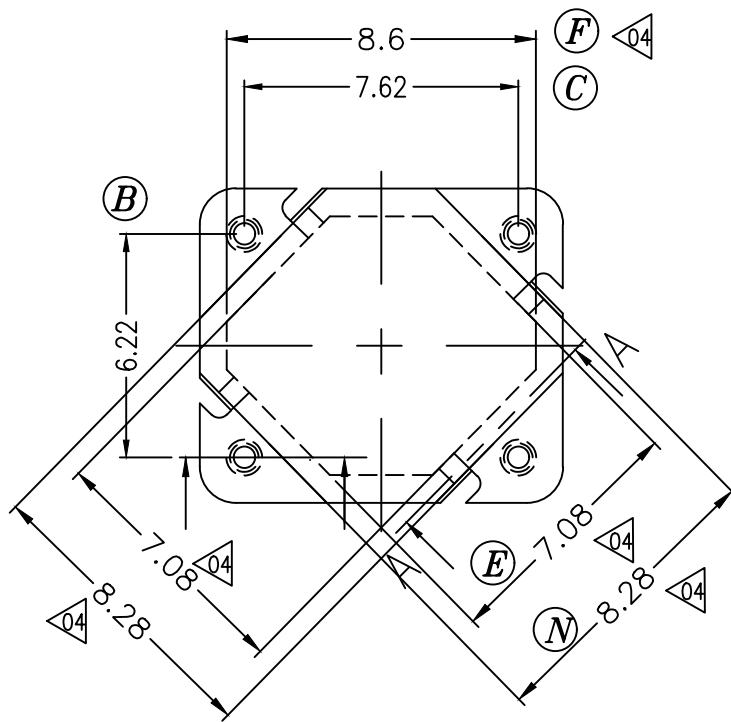



SEC A-A



NOTE:

PIN PULL-OUT FORCE SHOULD BE
0.8KG MIN. BEFORE SOLDERING
1.2KG MIN. AFTER SOLDERING

REV.	REVISIONS REC.	DATE.	REV.	REVISIONS REC.	DATE.
1	ADD NOTE		04	修改規格 8.9→8.6;7.5→7.2;	
2	(G) 4.2 CHANGE TO 4.3±0.1			修改規格 7.28→7.08;8.48→8.28	06.12.22
3	整理圖面發行				

DRAWN & DRAFTED BY	CAO SI ZHI	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE: T-H BASE 10.1X8.75X5	
CHECKED & APPROVED BY	JOHN RONG	$0 < L \leq 4 \pm 0.1$ $4 < L \leq 16 \pm 0.2$ $16 < L \leq 63 \pm 0.3$	UNIT: MM	BOBBIN MATERIAL: DAP AM113	UL REC. UL 94-V0
ORIGIN: DG			PIN MATERIAL: 磷青銅ø0.6	PIN TENSION LOAD:	
			DATE: Dec.22 '2006	DRAWING NO. PB-022	REV. 4



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546