

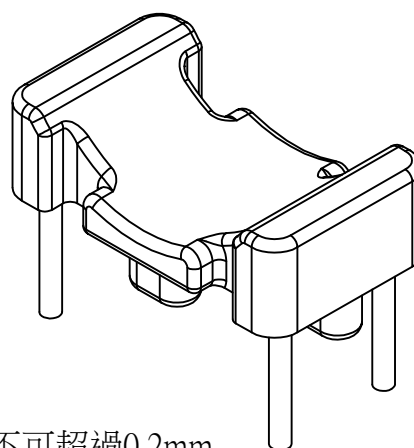
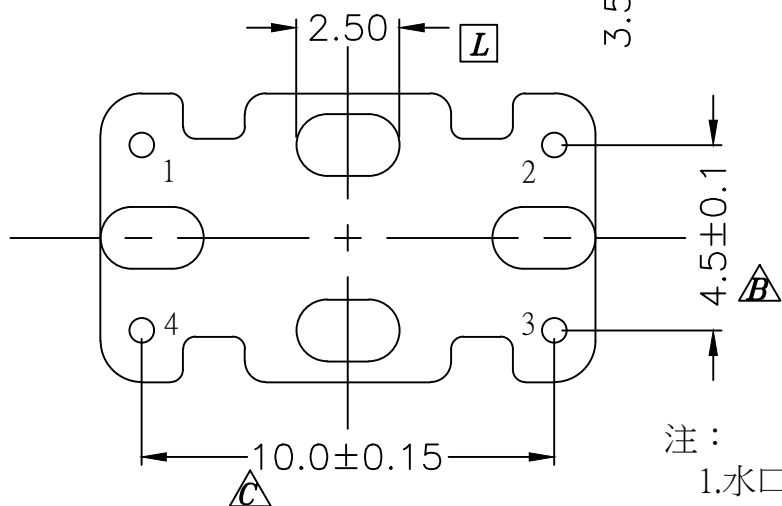
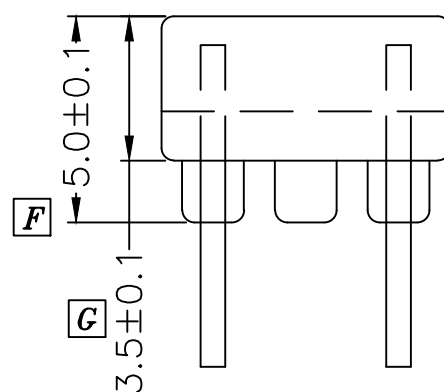
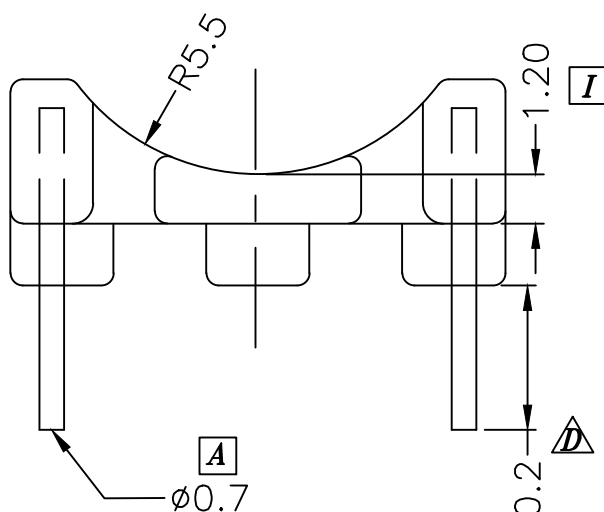
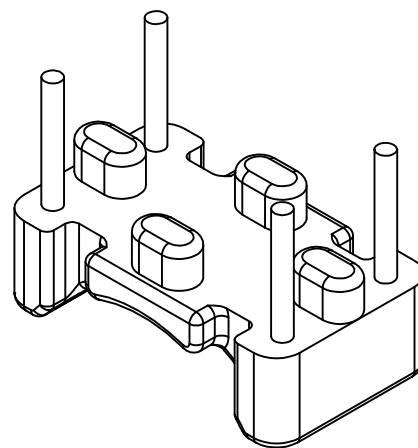


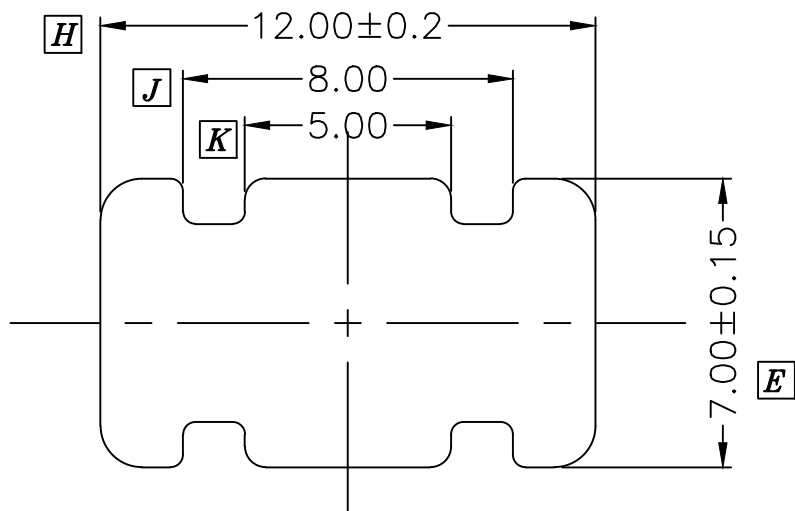

- 注：
1. 水口毛邊不可超過0.2mm.
 2. 測量時避開水口.

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	刪除尺寸(M),(N),(O),(P)						
2	變更尺寸(D)4.0->3.5±0.5		2006.04.12				
3	變更尺寸(D)3.5±0.5->3.5±0.2		2006.04.25				

DRAWN & DRAFTED BY	YANG JIAN	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	12X7X4 BASE		
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL: T375J BK	UL REC. UL 94V-0	
		16<L≤63 ±0.3		MM			
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:
				DG	CP線 3/4H		1.50KG MIN
					DATE:	DRAWING NO.	REV.
					OCT.11 2001	PB-025	3



PIN SHINE INDUSTRIAL CO., LTD.
TEL: 886-2-22990545 FAX: 886-2-22990546