
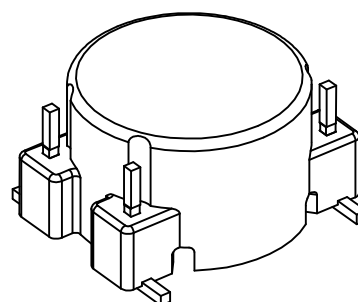
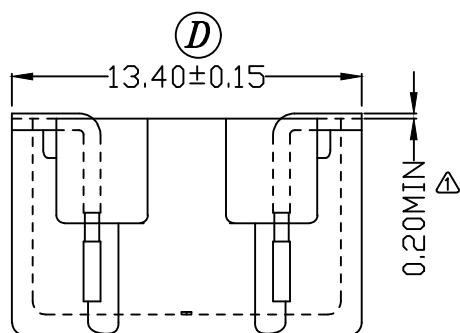
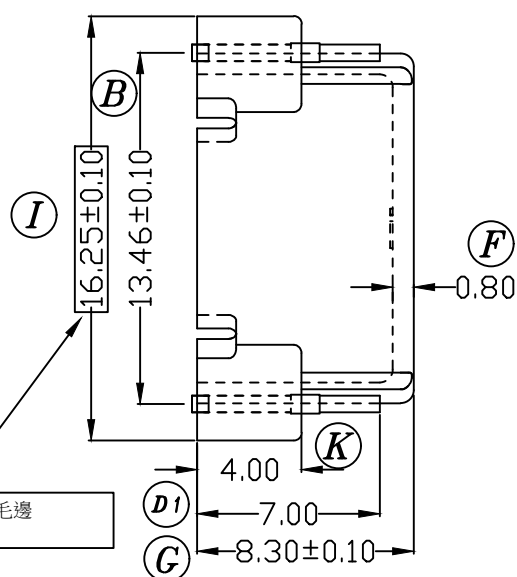
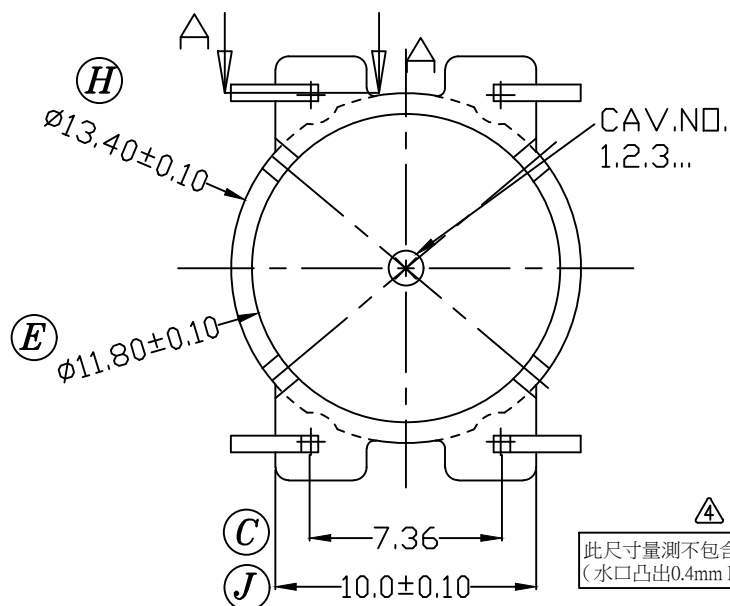
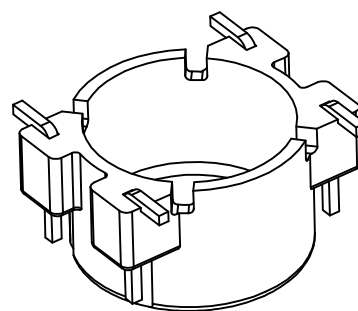


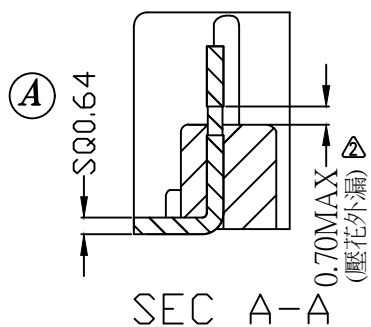

△ 鍍層規格: Ni 1.25~2.5um Sn 5~10um.

REV.	REVISIONS	REC.	DATE
01	更改尺寸 (0.4±0.10-->0.2MIN). △		2011.06.11
02	增加外漏壓花. △		2011.08.11
03	新增PIN鍍層規格標示. △		2020.03.26
04	新增備註. △		2021.02.23

REV.	REVISIONS	REC.	DATE

DRAWN & DRAFTED BY	GUAN XIN HAI	TOLERANCES		ANGLE:	TITLE:		
		$0<L\leq 4 \pm 0.1$	pin pitch ± 0.2	$\pm 1^{\circ}$	COVER		
CHECKED & APPROVED BY		$4<L\leq 16 \pm 0.2$		UNIT:	BOBBIN MATERIAL:	UL REC.	
		$16<L\leq 63 \pm 0.3$	MM	PHENOLIC PM9820(BK)	UL 94V-0		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				DG	PB WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
					AUG.24 '2006	PB-053	04



PIN SHINE INDUSTRIAL CO., LTD.
TEL: 886-2-22990545 FAX: 886-2-22990546