
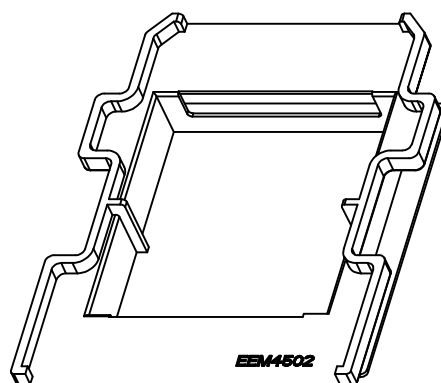
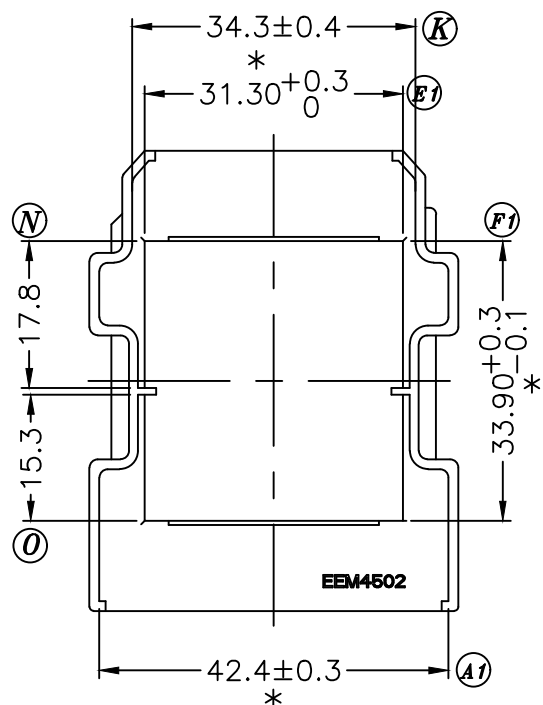
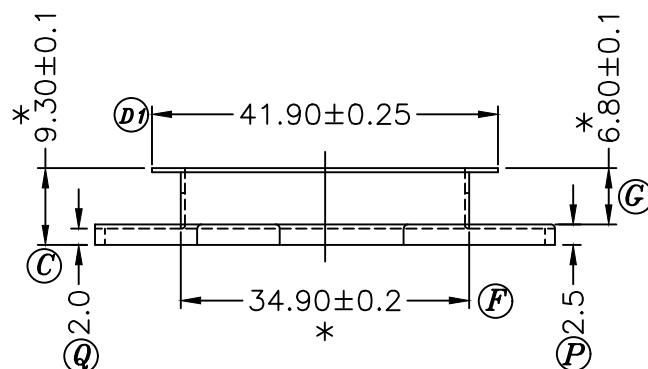


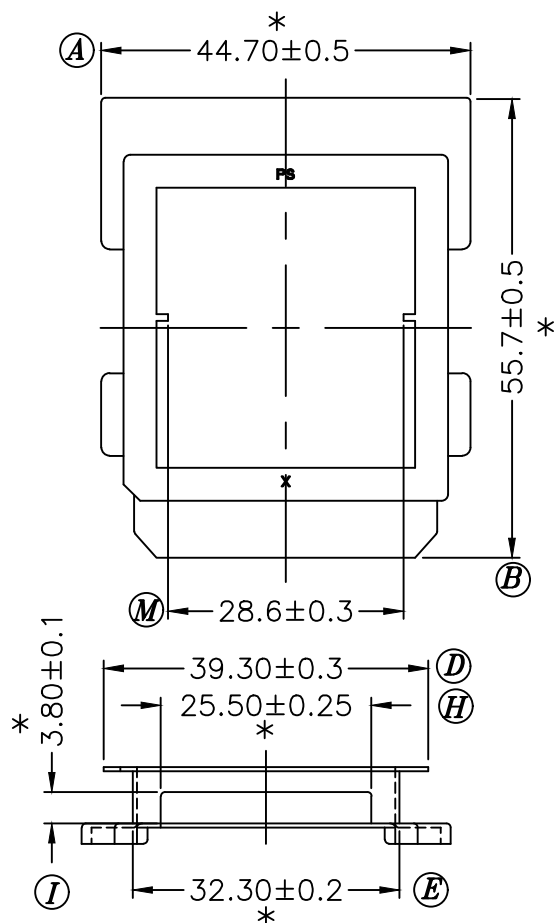

注：

1.未注R角為0.3mm.

2.公差：RANGE X.X X.XX
 0~10 :±0.1 ±0.05
 10~20 :±0.2 ±0.15
 Above 20 :±0.3 ±0.20

3.與C-260共模,與P-4502-1 BOBBIN配合

4.標注*的尺寸為重點管控尺寸.

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
0	圖面發行		11/29-10	3	公差設變,原有公差由品翔規格修訂為客戶公差		07/01/'11
1	更新品名,增加注解4		11/30-10	4	圖面更新		07/05/'11
2	E1,F1公差設變.		04/19/'11				

DRAWN & DRAFTED BY	LIU LI	TOLERANCES	ANGLE:	TITLE:
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	±1°	EFD4549 COVER
		pin pitch ±0.2	UNIT: MM	BOBBIN MATERIAL: PET FR530
			ORIGIN: SZ	UL REC. UL94V-0
				PIN MATERIAL: /
				PIN TENSION LOAD: /
				DATE: JULY.05'2011
				DRAWING NO. C-260-1
				REV. 4



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546