

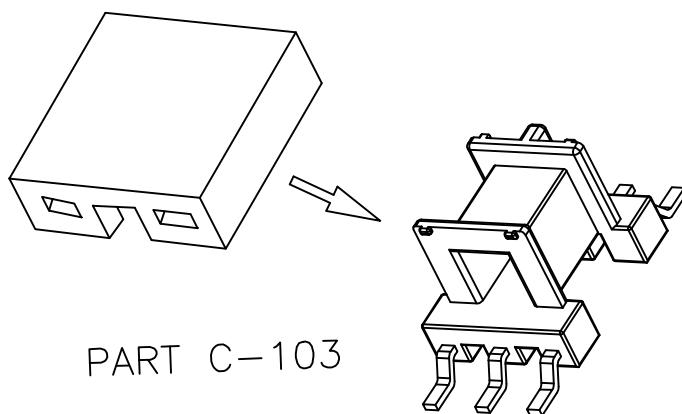
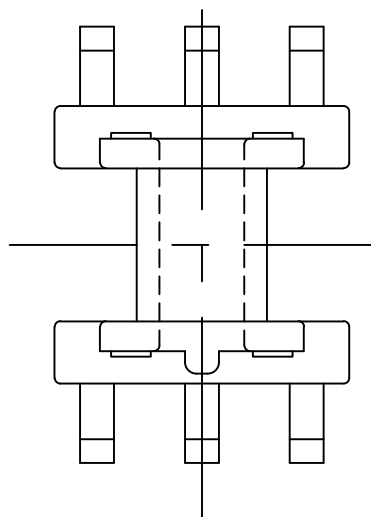
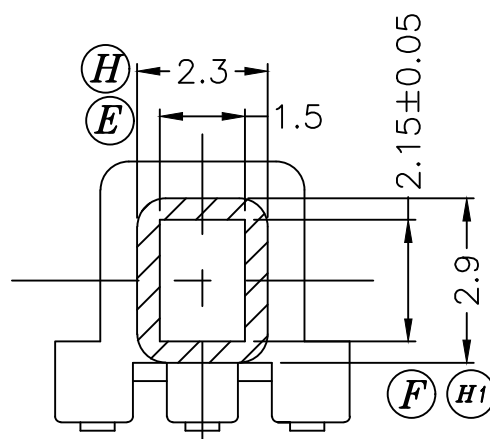
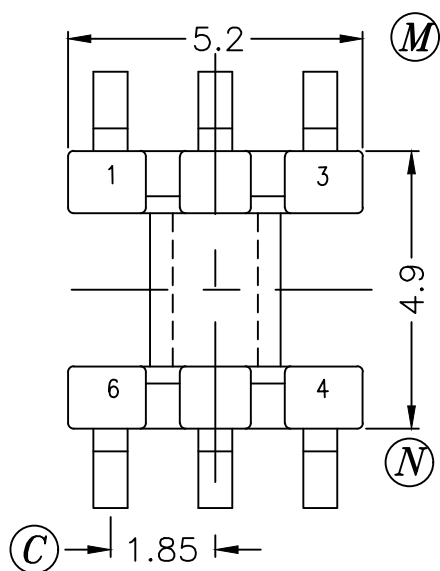


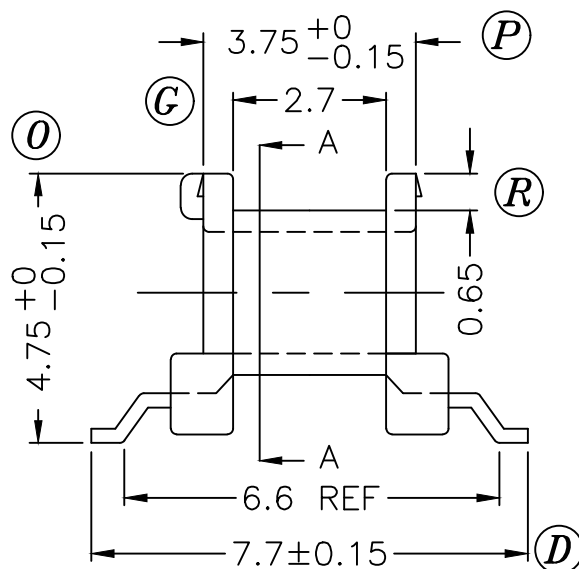

PART C-103

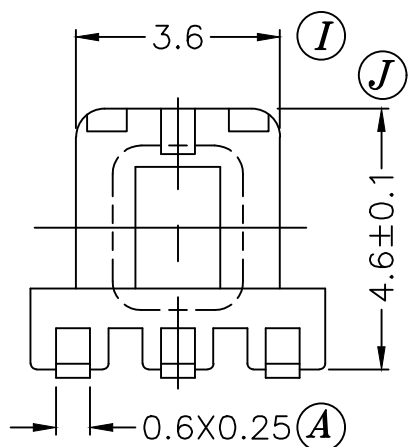

SEC. A-A

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	THE DIMENSION POSITION MARKED:(O)	00.9.20	3	UPDATE DRAWING.	04.3.09
2	CANCEL (L),(B1); PIN TENSION LOAD1.5KG -->0.9KG;	03.4.21			
	UPDATE DRAWING.				

DRAWN & DRAFTED BY	YE JIN HONG	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch 0.1 MAX	±1°	SMD BOBBIN EE-5.0		
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:		UL REC.
		16<L≤63 ±0.3	MM	LCP E4008		UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:
				DG SZ	PHOSPHOR BRONZE		0.9KG MIN
					DATE:	DRAWING NO.	REV.
					APR.02 '2003	S-502-2	3



PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545

FAX:886-2-22990546

