
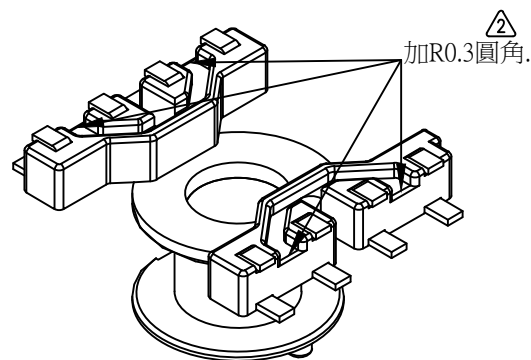
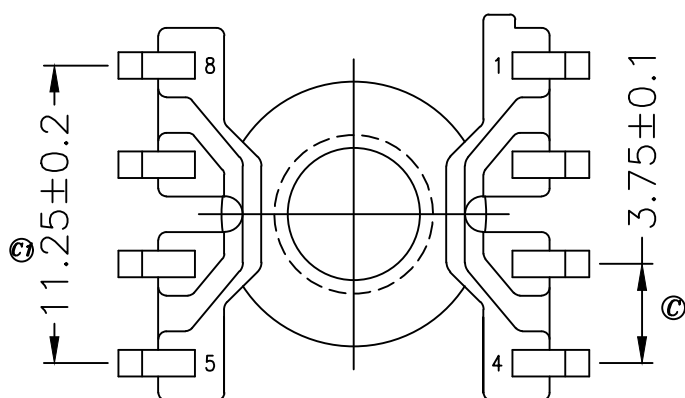
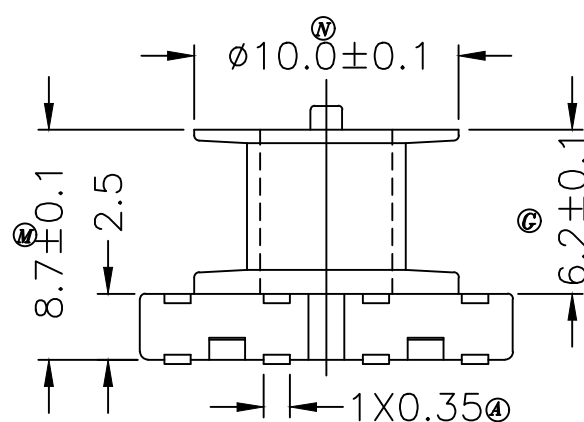
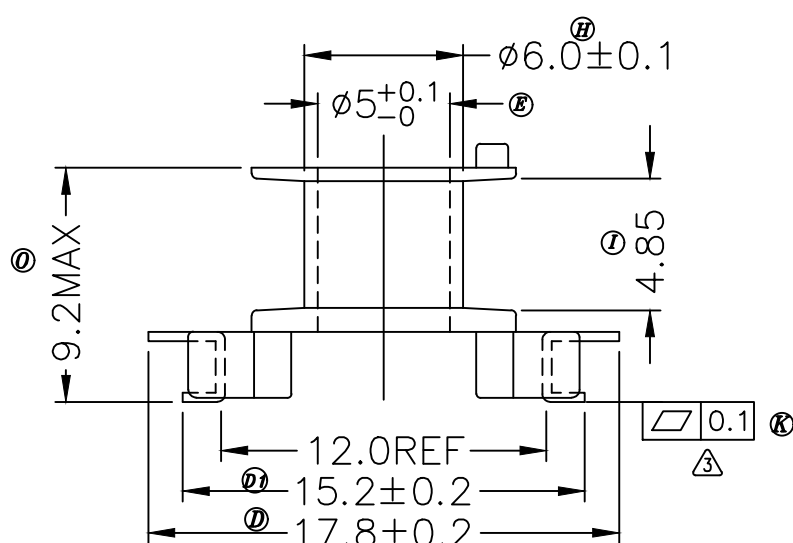
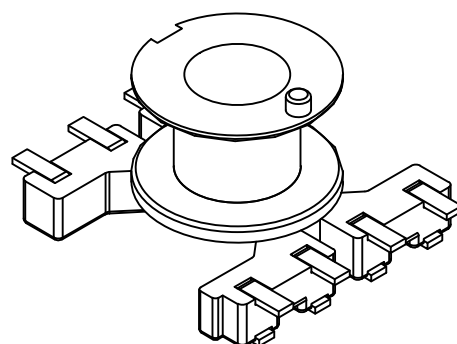


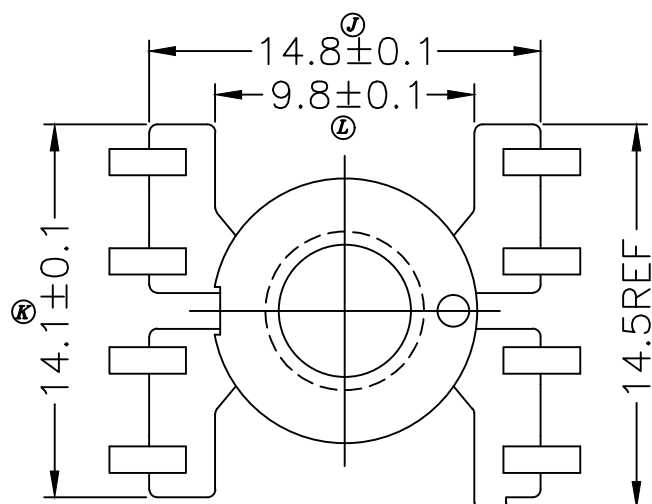

備注:

- 1.電鍍成份及厚度規格: 鍍全錫 (厚度: 7~12um), 鍍鎳底: 1.25~2.5um.
- 2.端子平面度: 0.1mm MAX.

B-075.101.P

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	CANCEL(P).(O).(B1).(R).(S);ADD(I);UPDATE DRAWING	06.10.20			
2	ADD R ANGEL	11.08.05			
3	ADD COPLANARITY.UPDATE DRAWING	12.04.11			

DRAWN & DRAFTED BY	LI JIE	TOLERANCES	ANGLE:	TITLE:	
CHECKED & APPROVED BY	WANG JIN LAN	0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	±1°	C TYPE SMD BOBBIN RM-5	
			UNIT:	BOBBIN MATERIAL:	UL REC.
			MM	PM-9630	UL 94V-0
			ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:
			DG	PHOSPHOR BRONZE	1.0KG MIN
				DATE:	DRAWING NO.
				JUL.27 2002	S-506
					REV. 3



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546