

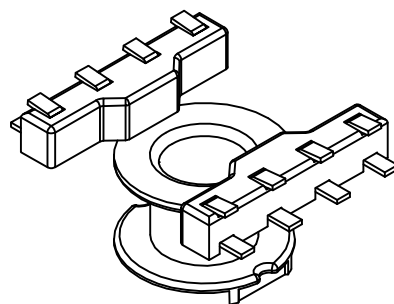
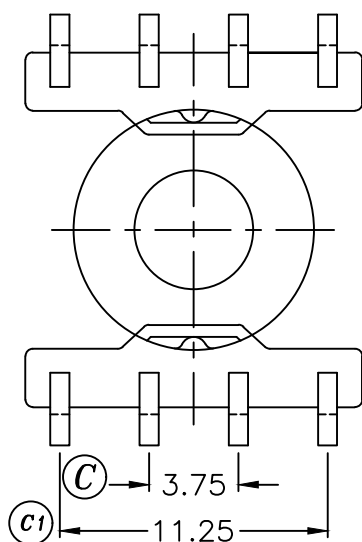
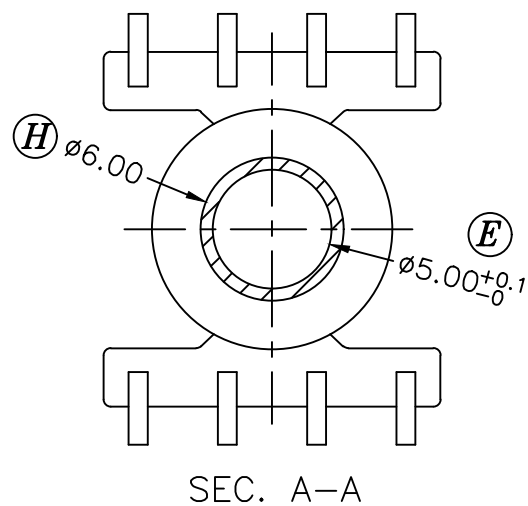
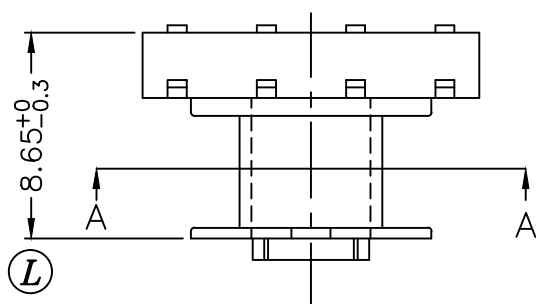


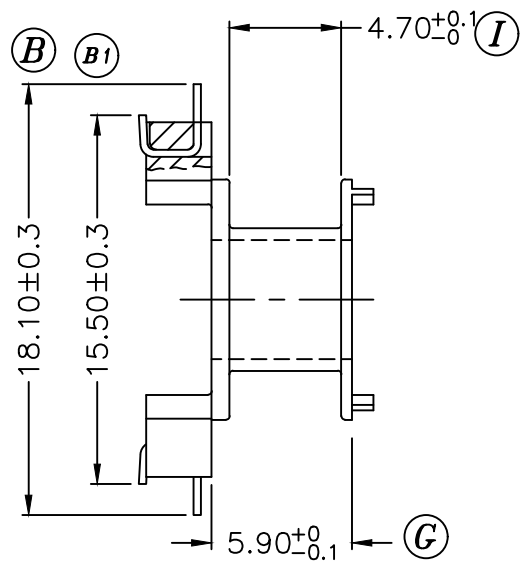

備注：  
端子平面度：0.1mm MAX.

| REV. | REVISIONS REC.                                              | DATE     | REV. | REVISIONS REC. | DATE     |
|------|-------------------------------------------------------------|----------|------|----------------|----------|
| 1    | UPDATE THE DRAWING FOR TERMINAL SPEC.                       | 02.02.15 |      |                | 06.10.20 |
| 2    | CHANGE DRAWING NO. FROM P-503 TO S-508.                     | 03.02.15 |      |                |          |
| 3    | CANCEL (O),(R); PIN TENSION LOAD 1.5 → 1.0; UPDATE DRAWING. | 03.04.02 |      |                |          |

|                       |           |             |         |                  |                   |
|-----------------------|-----------|-------------|---------|------------------|-------------------|
| DRAWN & DRAFTED BY    | WANG YING | TOLERANCES  | ANGLE:  | TITLE:           |                   |
| CHECKED & APPROVED BY | JOHN RONG | COPLANARITY | UNIT:   | BOBBIN MATERIAL: | UL REC.           |
|                       |           | 0.1 MAX     | MM      | PHENOLIC PM9630  | UL 94V-0          |
|                       |           |             | ORIGIN: | PIN MATERIAL:    | PIN TENSION LOAD: |
|                       |           |             | DG      | PHOSPHOR BRONZE  | 1.0KG MIN         |
|                       |           |             |         | DATE:            | DRAWING NO.       |
|                       |           |             |         | APR.02 '2003     | S-508             |
|                       |           |             |         |                  | REV. 3            |

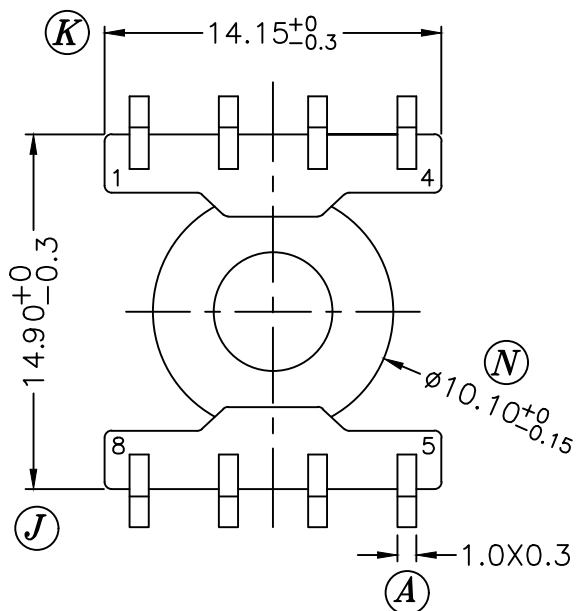

PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546