
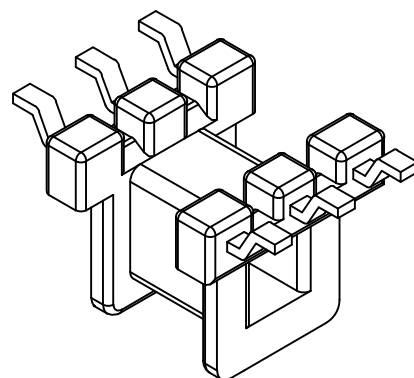
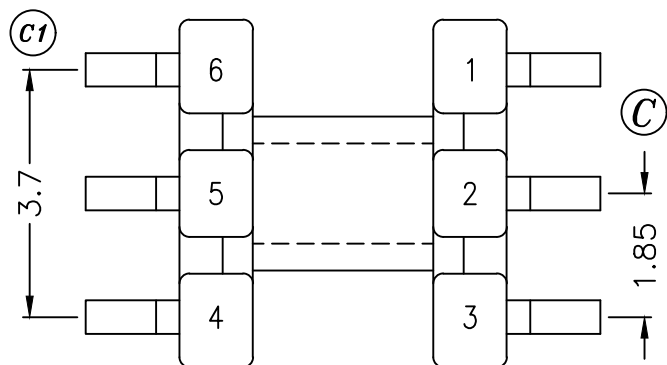
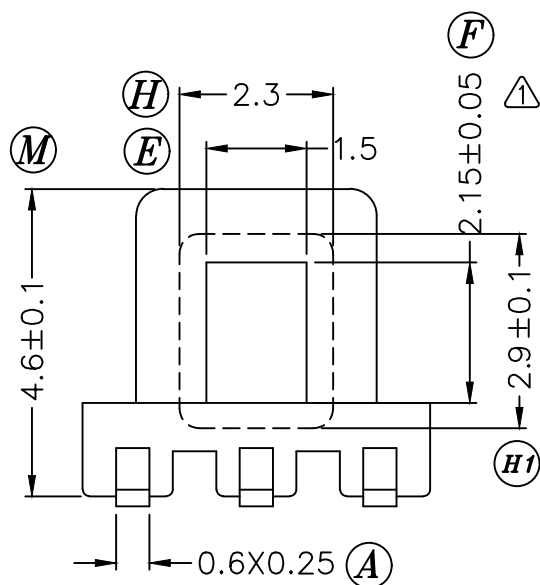
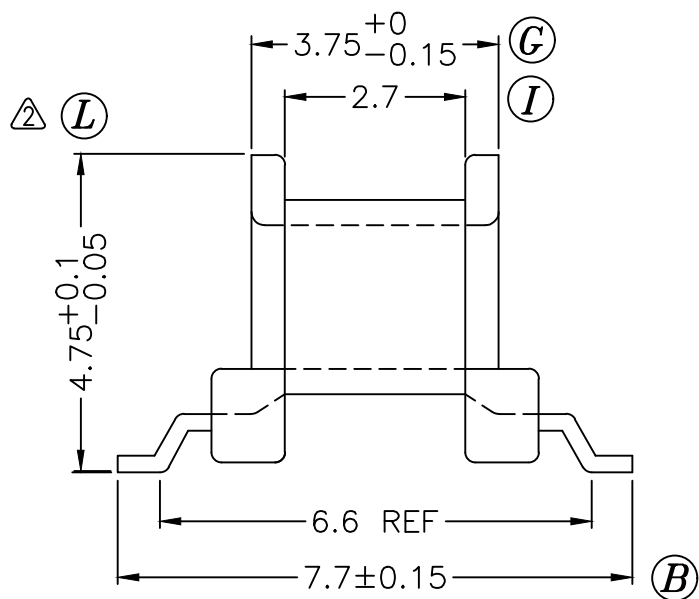
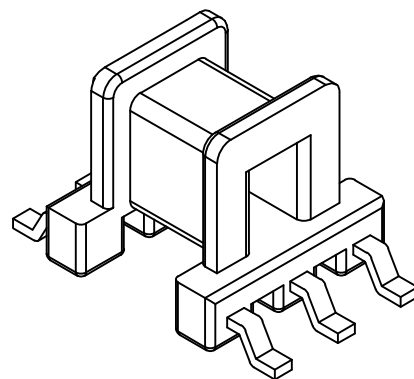
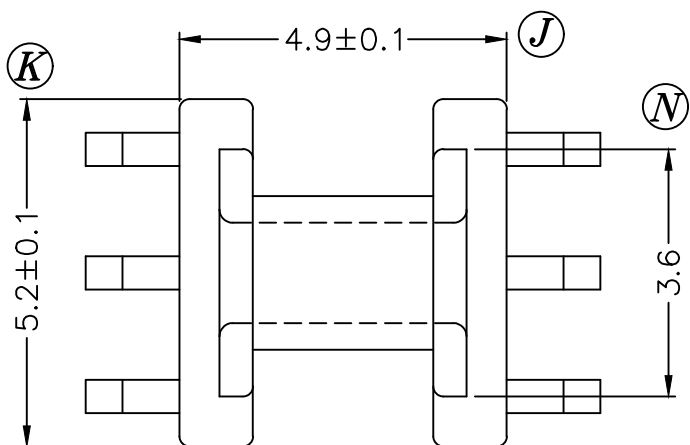




REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	AMEND DIMENSION	21.5==>2.15	2008.07.09				
2	Change tolerance	4.75+0.15/-0==>4.75+0.1/-0.05	2011.03.14				

DRAWN & DRAFTED BY	吳志堅	TOLERANCES		ANGLE:	TITLE:			
		0<L≤4 ±0.1	COPLANARITY 0.1 MAX	±1°	SMD BOBBIN EE-5.0			
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:		UL REC.	
		16<L≤63 ±0.3		MM	LCP E4008		UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:	
				DG	PHOSPHOR BRONZE		1.5KG MIN.	
					DATE:	DRAWING NO.	REV.	
					APR.02 '2003	S-509	2	