
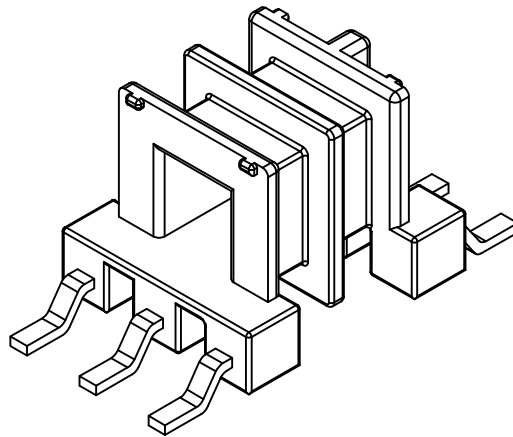
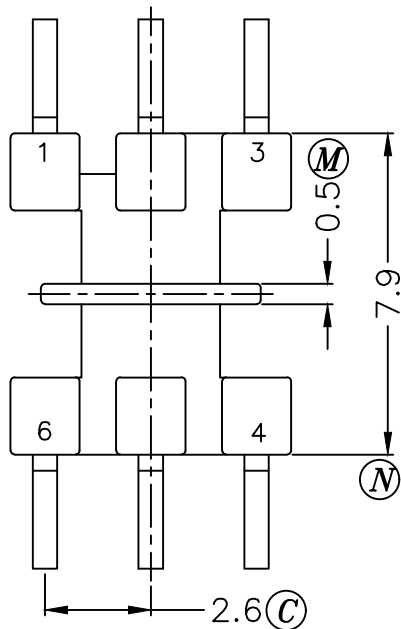
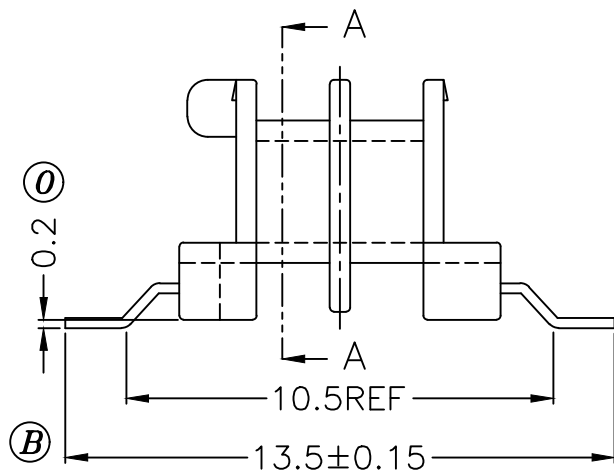
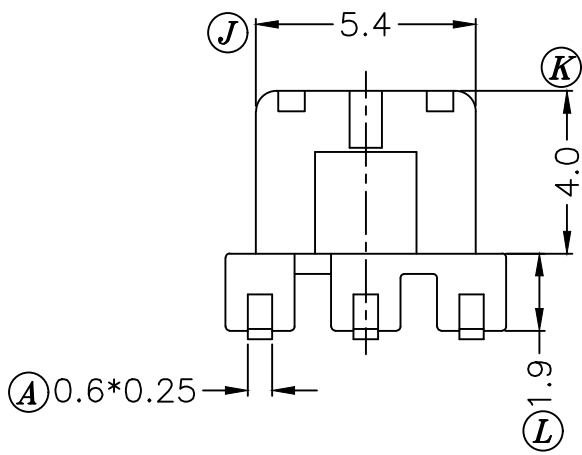
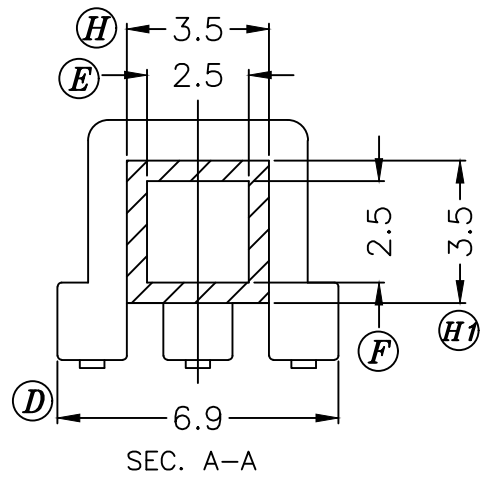
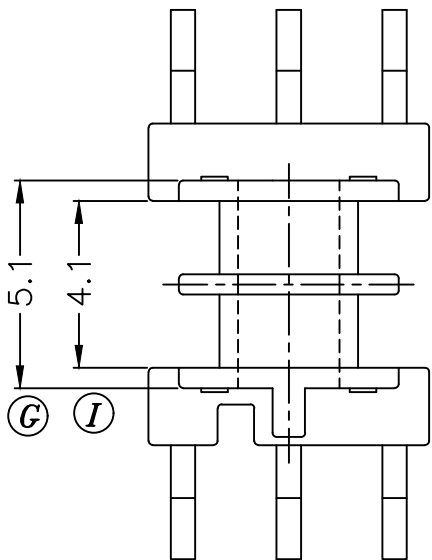




REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	(A)CHANGE TO 0.6*0.25		'05.08.15				
2	UPDATE DRAWING		'07.12.27				

DRAWN & DRAFTED BY	JING WEI JIE	TOLERANCES		ANGLE:	TITLE:			
		0<L≤4 ±0.1	pin pitch ±0.05	±1°	SMD BOBBIN ED-8.0 (2-SEC)			
4<L≤16 ±0.2	UNIT:	BOBBIN MATERIAL: LCP E4008		UL REC. UL 94V-0				
CHECKED & APPROVED BY					16<L≤63 ±0.3	MM		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:	
				DG	PHOSPHOR BRONZE		1.5KG MIN	
					DATE:	DRAWING NO.		REV.
				FEB.13 '1998	S-801		2	