
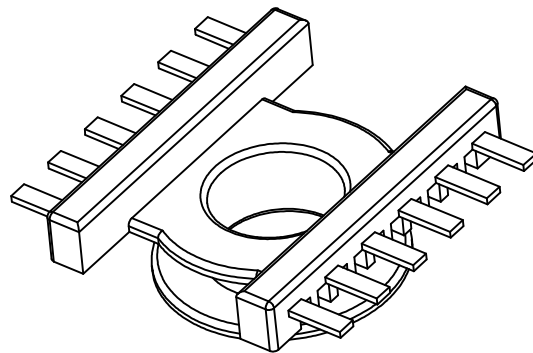
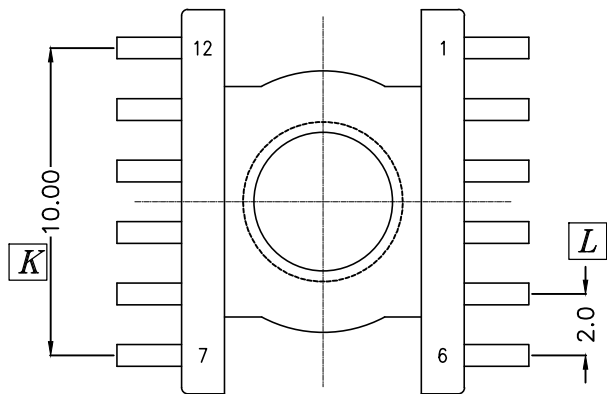
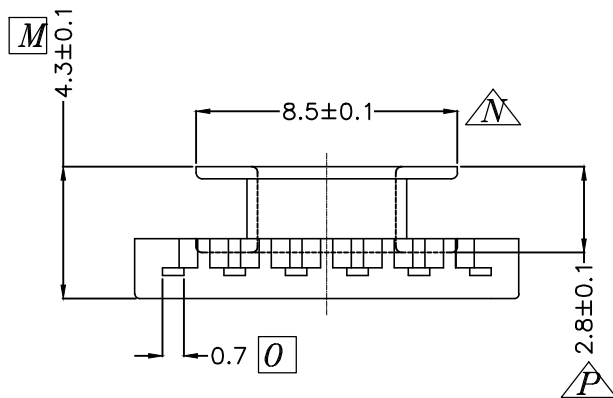
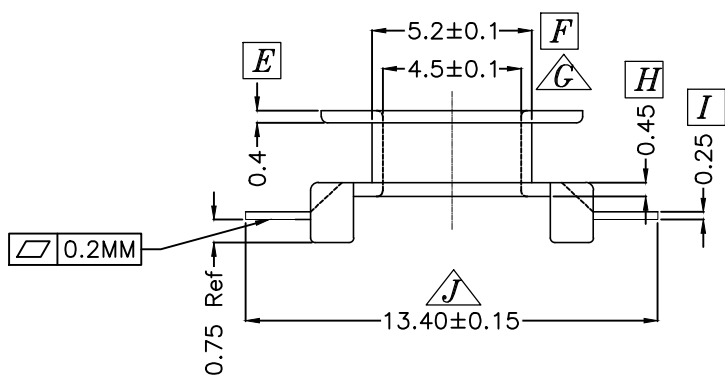
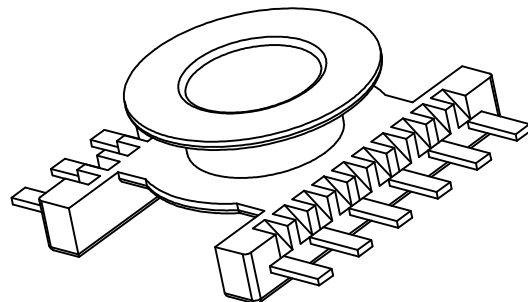


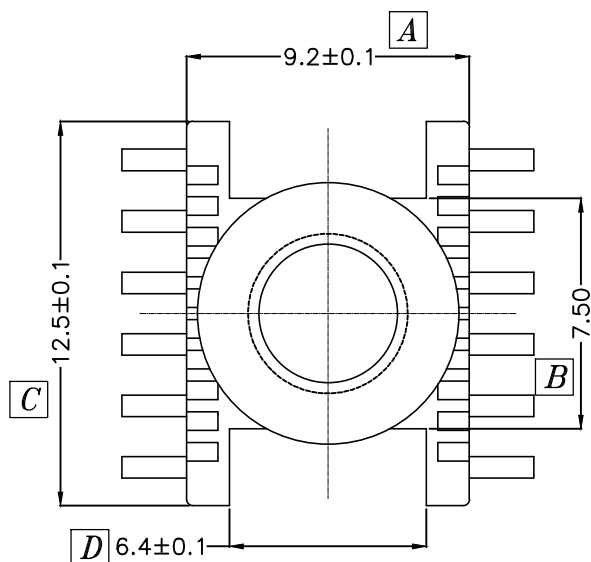

備註:

- 1.未定義 $R=0.3$
- 2.電鍍規格:Sn100% 5~10um
Ni 1.27~2.0um
- 3.此機種是在S-1103-2的基礎上折彎PIN 改直PIN生產。

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE

DRAWN & DRAFTED BY	DuJun Xu	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE:	ER-11/5 SMD BOBBIN		
CHECKED & APPROVED BY		$0 < L \leq 4 \pm 0.1$ $4 < L \leq 16 \pm 0.2$ $16 < L \leq 63 \pm 0.3$	pin pitch ± 0.2	UNIT: MM	BOBBIN MATERIAL: PM 9630JT (BK)	UL REC. UL 94V-0	
ORIGIN: DG				PIN MATERIAL: C5191-H	PIN TENSION LOAD: 1.0KG MIN		
PIN SHINE INDUSTRIAL CO., LTD. TEL: 886-2-22990545 FAX: 886-2-22990546				DATE: 2023.11.10	DRAWING NO. S-1103-4	REV. 0	