
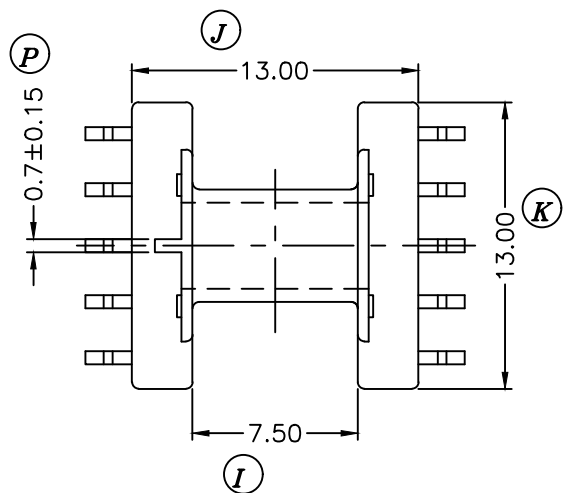
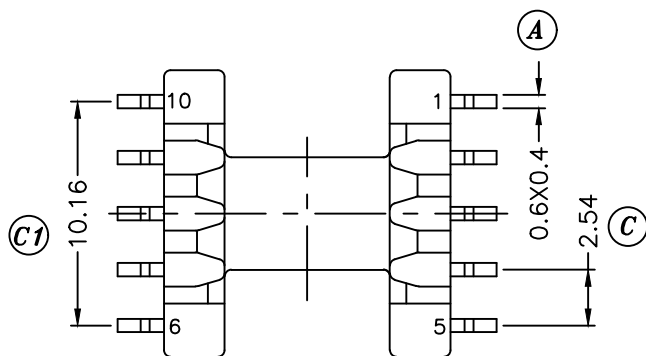
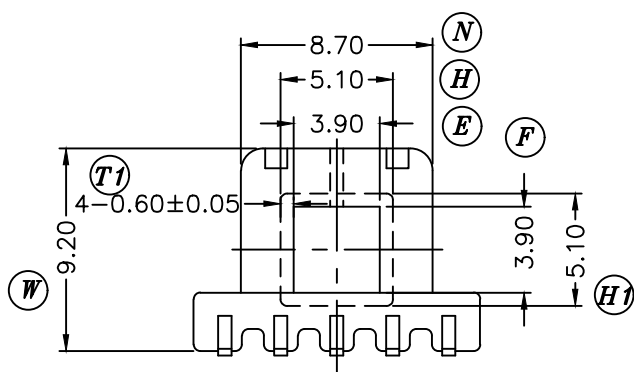
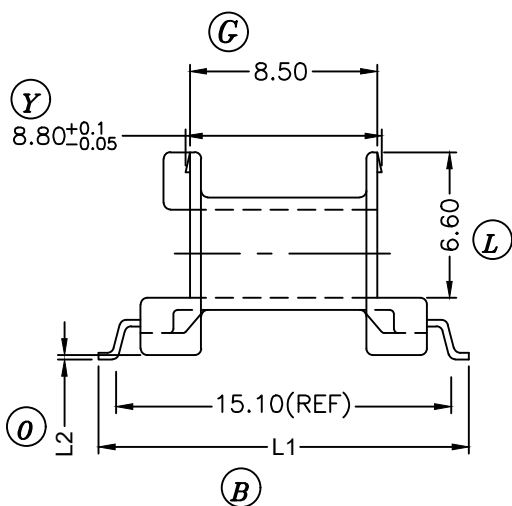


PART C-105



B-053.101L(B-053)

備注：

1. L1:16.8+/-0.2mm或17.2+/-0.2mm
L2 : 0.35+/-0.1mm或0.2+/-0.1mm

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
01	整理圖面		08.03.01				
02	增加規格：S-1204-3		04.03.19				
03	增加尺寸 P:0.7+/-0.15		04.03.19				

DRAWN & DRAFTED BY	YEI JIN HONG	TOLERANCES		ANGLE: ±1°	TITLE: SMD BOBBIN EE-12.6			
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	COPLANARITY ±0.1	UNIT: MM	BOBBIN MATERIAL: PHENOLIC PM9630		UL REC. UL 94V-0	
				ORIGIN: DG	PIN MATERIAL: PHOSPHOR BRONZE		PIN TENSION LOAD: 1.5KG MIN.	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					DATE: APR.03 '2003	DRAWING NO. S-1204		REV. 3



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546