
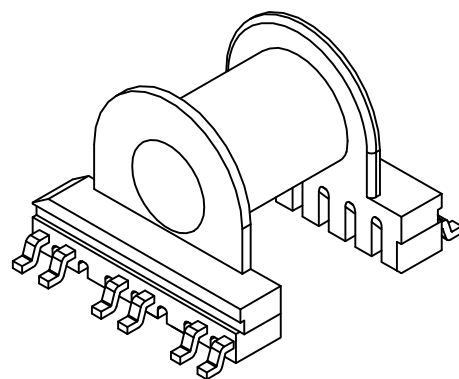
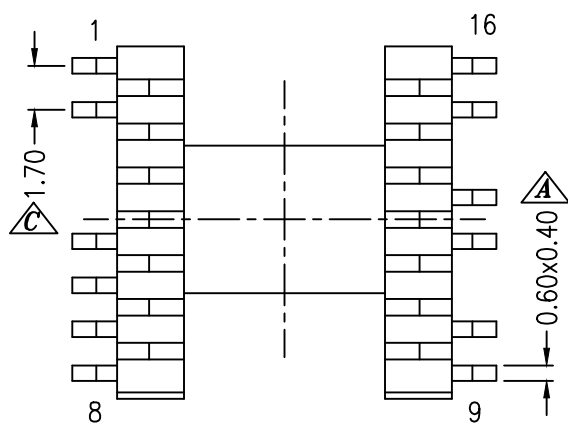
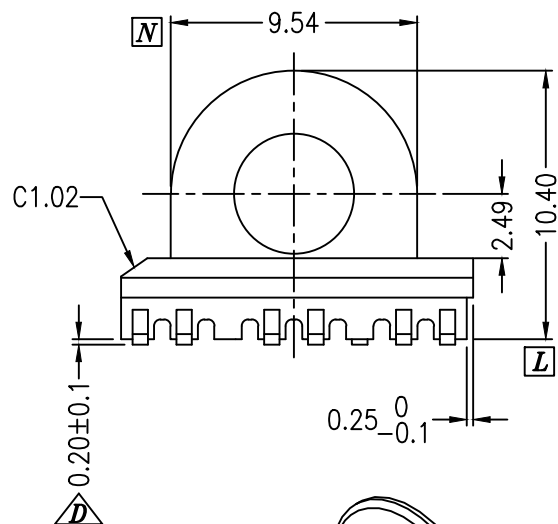
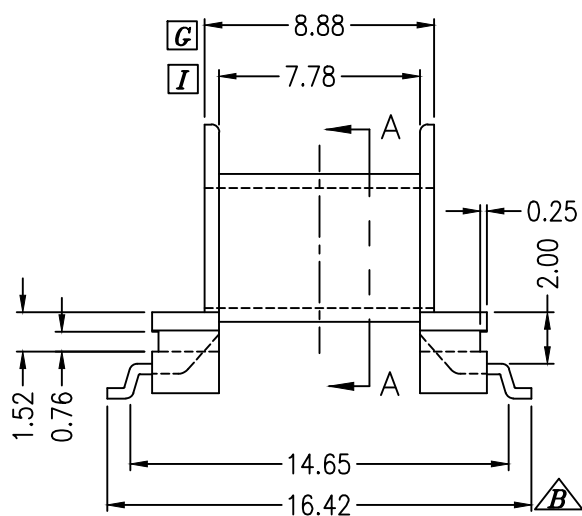
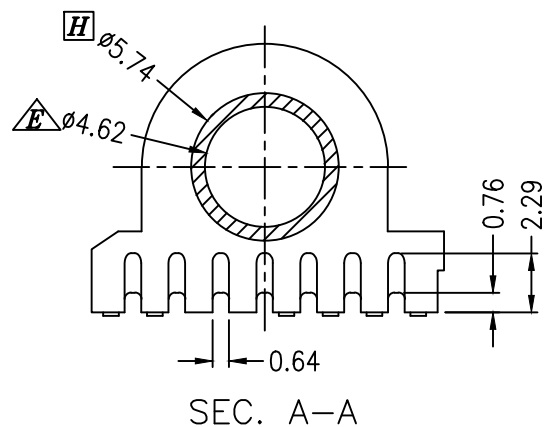
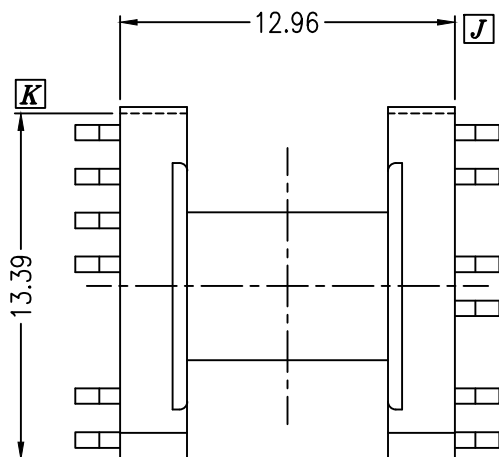




備註:

- 1.此機種是在S-1315-B的基礎上新開打彎治具,做懸空度 0.2 ± 0.1 mm
- 2.電鍍規格 SN100% 5~10um; Ni 1~3um
- 3.未定義R0.3

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE

DRAWN & DRAFTED BY	QINMENG	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	COPLANARITY 0.1 MAX	±1°	SMD BOBBIN EP-13		
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:	UL REC.	
		16<L≤63 ±0.3	MM	DAP AM113	UL 94V-0		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				DG	C5191 1/2H	1.0KG MIN	
					DATE:	DRAWING NO.	REV.
					27.07'2020	S-1315-C	0

TEL:886-2-22990545

FAX:886-2-22990546