
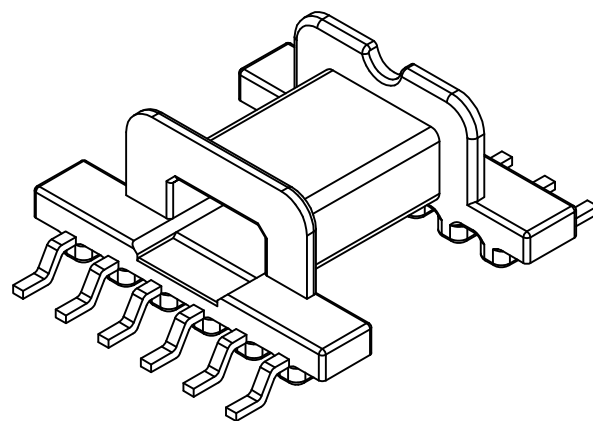
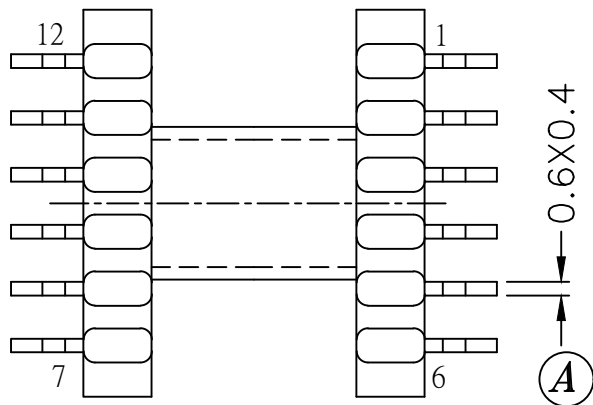
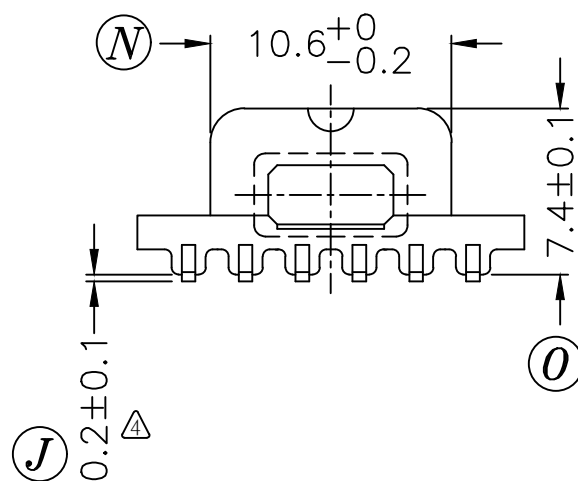
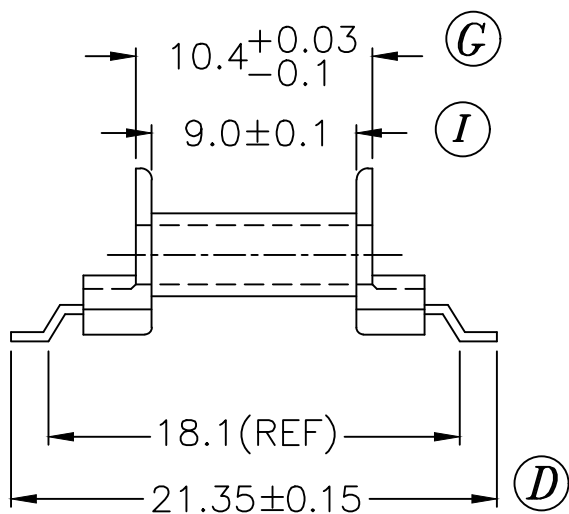
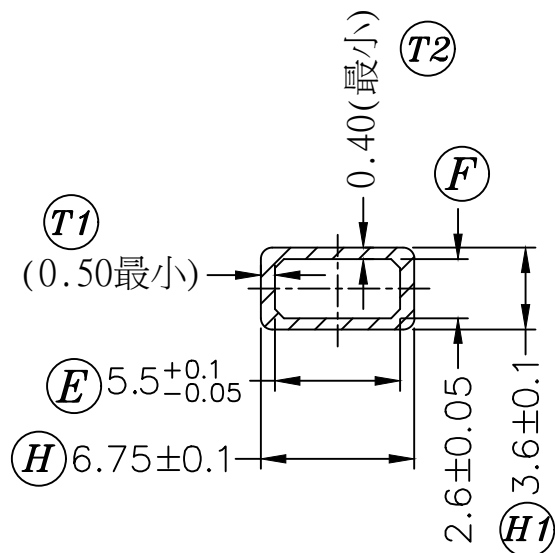


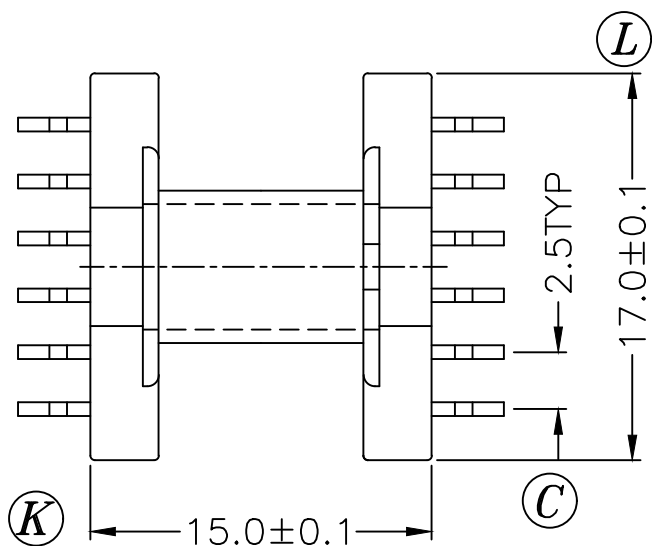

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1.	(B): $21.35^{+0}_{-0.2}$ CHANGE TO 21.35 (E): $5.5^{+0.1}_{-0}$ CHANGE TO 5.5. (F): $2.6^{+0.1}_{-0}$ CHANGE TO 2.6 (G): 10.4 ± 0.1 CHANGE TO 10.4. (H): 6.75 ± 0.1 CHANGE TO 6.75 (I): 9.0 ± 0.05 CHANGE TO 9.0. (M): 2.7 ± 0.05 CHANGE TO 2.7	02.2.20	3	PIN TENSION LOAD: 1.5KG CHANGE TO 1.0KG MIN.	04.8.10
2	CANCEL (M),(D); UPDATE DRAWING	03.5.15	4	CHANGE 0.15MIN----> 0.2 ± 0.1 (triangle symbol)	12.04.25
			5	UPDATE DRAWING BY THE HORIZONTAL DRAWING.	12.05.28

DRAWN & DRAFTED BY	Lu PenG	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE: SMD BOBBIN EFD-15		
CHECKED & APPROVED BY		$0 < L \leq 4 \quad \pm 0.1$ $4 < L \leq 16 \quad \pm 0.2$ $16 < L \leq 63 \quad \pm 0.3$	UNIT: MM	BOBBIN MATERIAL: PHENOLIC PM-9630	UL REC. UL 94V-0	
PIN SHINE INDUSTRIAL CO., LTD.			ORIGIN: DG	PIN MATERIAL: PHOSPHOR BRONZE	PIN TENSION LOAD: 1.0KG MIN	
TEL: 886-2-22990545 FAX: 886-2-22990546				DATE: APR.04 '2003	DRAWING NO. S-1502	REV. 5