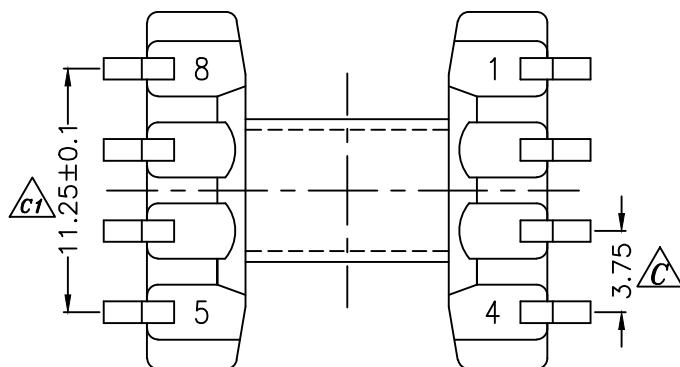
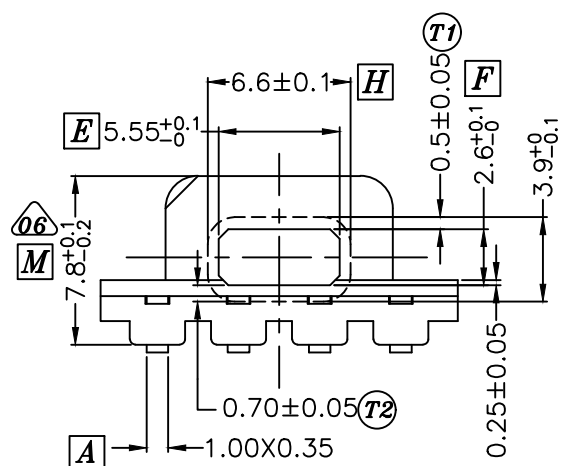
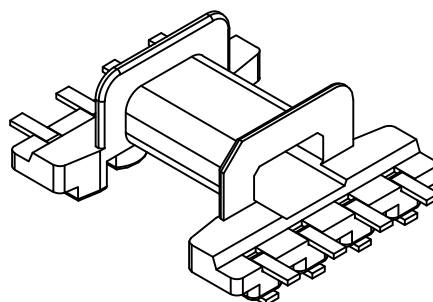


- 1.腳長和腳位規格參照系統資料
- 2.PIN 之平面度需控制在0.1mm MAX

DRAWN & DRAFTED BY	HUANG JIN YU	TOLERANCES		ANGLE:	TITLE:		
CHECKED & APPROVED BY		0<L≤4 ±0.1	COPLANARITY 0.1 MAX	±1°	C TYPE SMD BOBBIN EFD-15		
		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:		UL REC.
		16<L≤63 ±0.3		MM	PHENOLIC PM9630		UL 94V-0
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:
				DG	PHOSPHOR BRONZE		3.1KG MIN
					DATE:	DRAWING NO.	REV.
					APR.04 '2003	S-1508	6