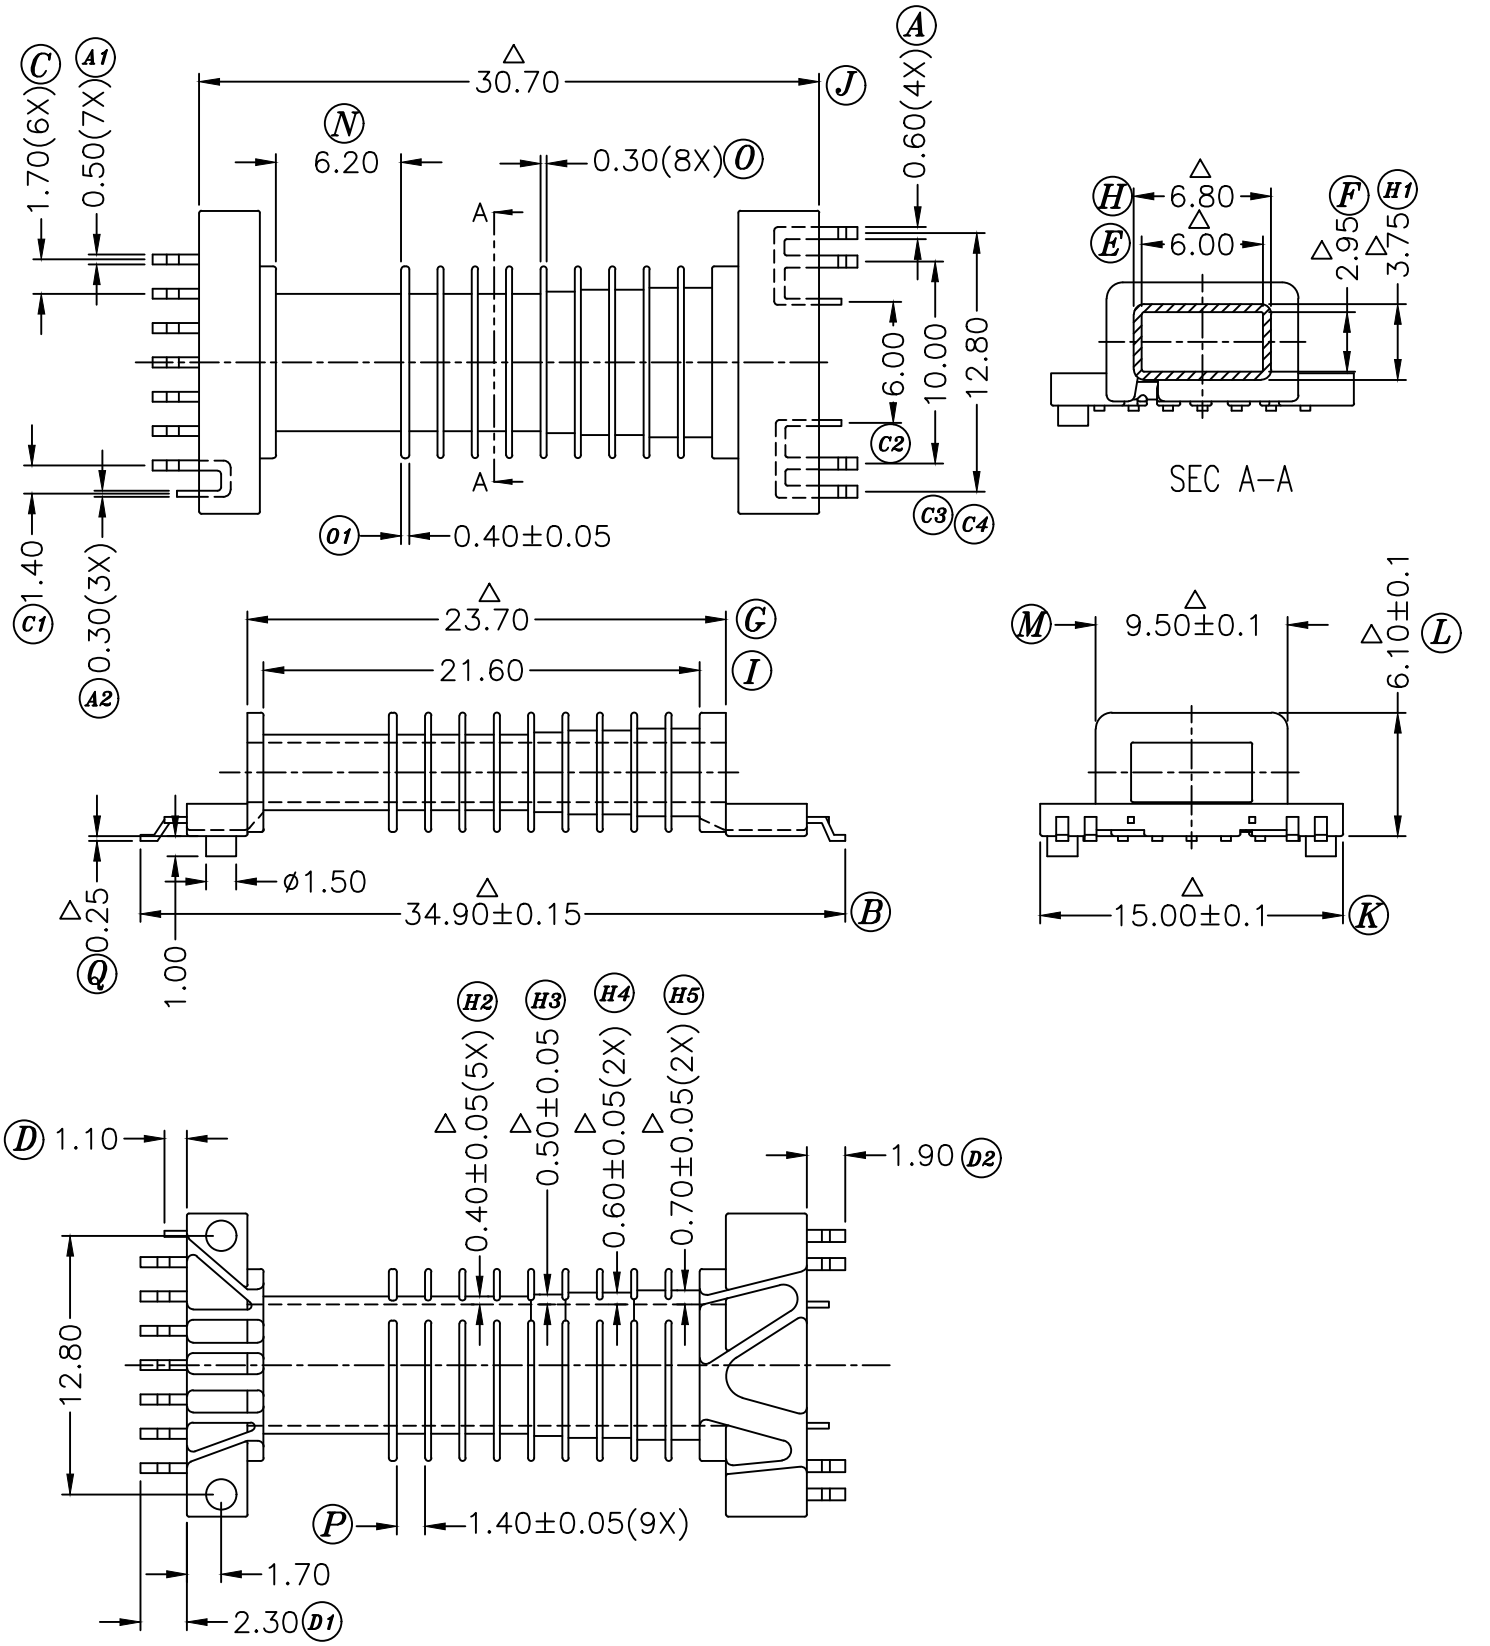


| REV. | REVISIONS REC. | DATE | REV. | REVISIONS REC. | DATE |
|---|---|---|---|---|---|
| 1 | 端子材質硬度由1/2H->H | 04/17/06' | | | |
| | | | | | |
| | | | | | |

| | | | | | |
|---|---|---|---|---|---|
| DRAWN & DRAFTED BY | WANG GANG | TOLERANCES: 0<L≤4 ±0.1; 4<L≤16 ±0.2; 16<L≤63 ±0.3; COPLANARITY 0.1MAX | ANGLE: ±1° | TITLE: EFD-15 BOBBIN | |
| CHECKED & APPROVED BY | | | UNIT: MM | BOBBIN MATERIAL: LCP E4008 | UL REC. UL 94V-0 |
| PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546 | | | ORIGIN: SZ | PIN MATERIAL: PHOSPHOR BRONZE (H) | PIN TENSION LOAD: 1.0KG MIN |
| | | | | DATE: APR.17 '2006 / DRAWING NO. S-1514-2 | REV. 1 |