

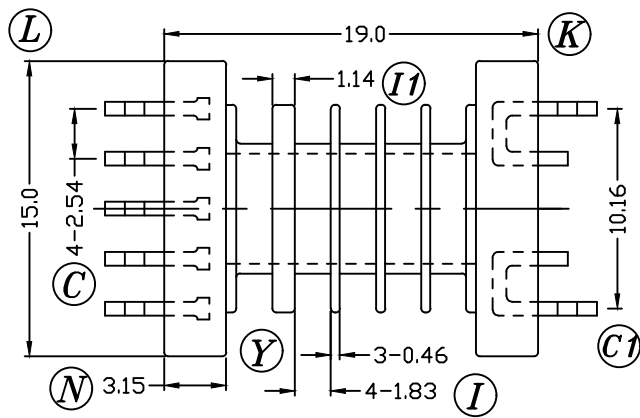
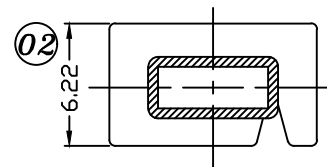
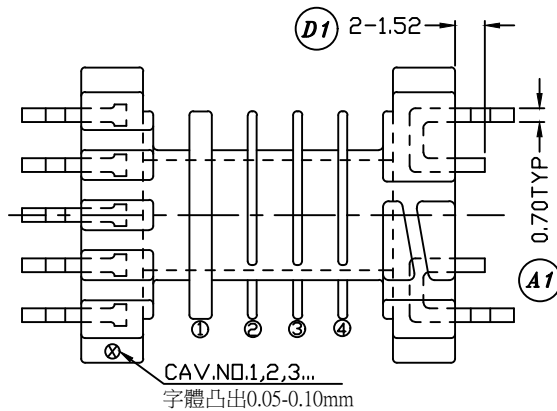
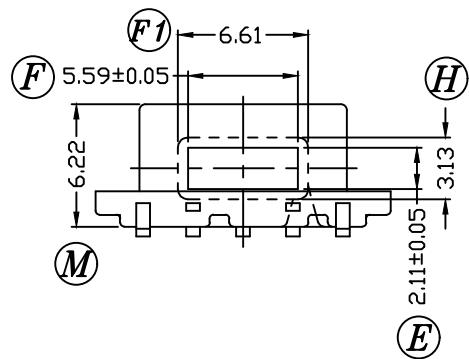
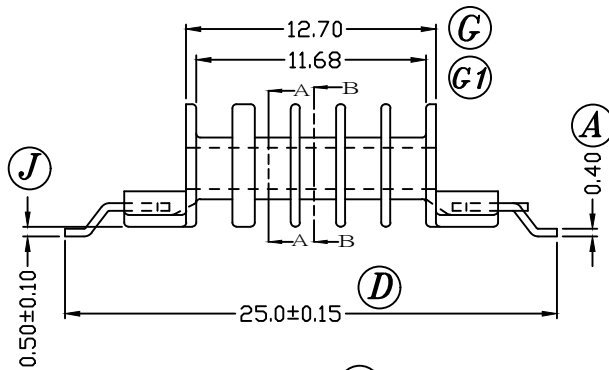


SEC A-A
葉片：1

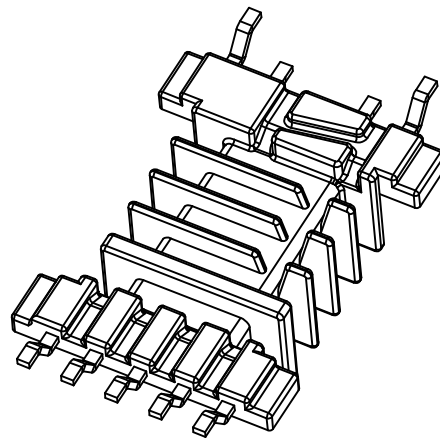

SEC B-B
葉片：2,3,4

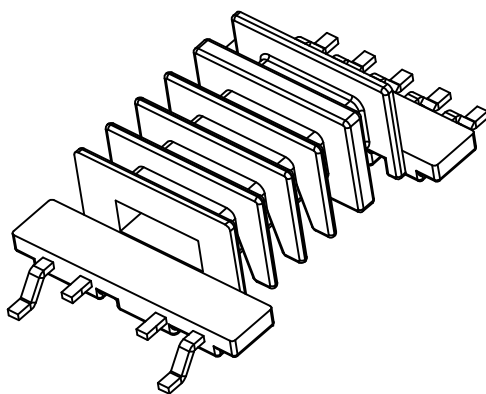

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
01	修改公差 10.54±0.2 --> 10.54+0.15/-0.2	△	2021.06.22				

DRAWN & DRAFTED BY	HUANG JIN YU	TOLERANCES		ANGLE:	TITLE:			
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	EFD 15 BOBBIN			
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:		UL REC.	
		16<L≤63 ±0.3		MM	LCP E4008		UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:	
				DG	C5191		1.5KG MIN.	
				DATE:	DRAWING NO.		REV.	
				JAN.27 '2007	S-1519		1	