

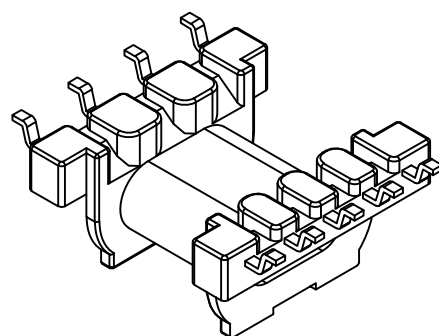
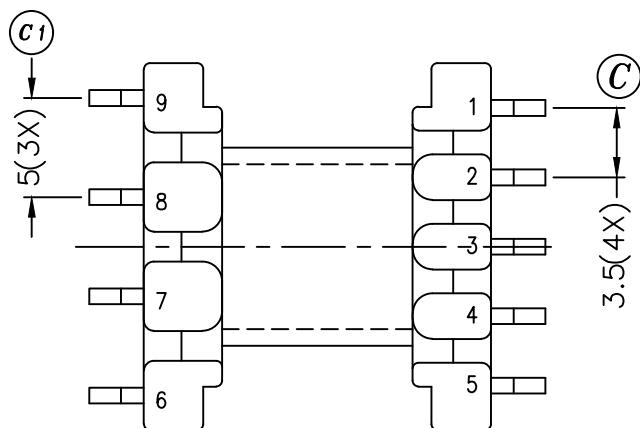
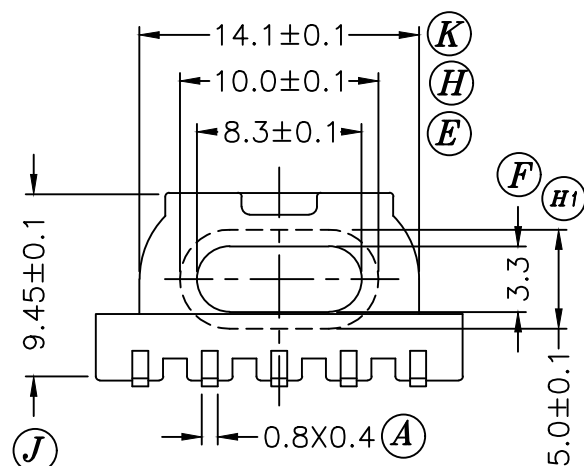
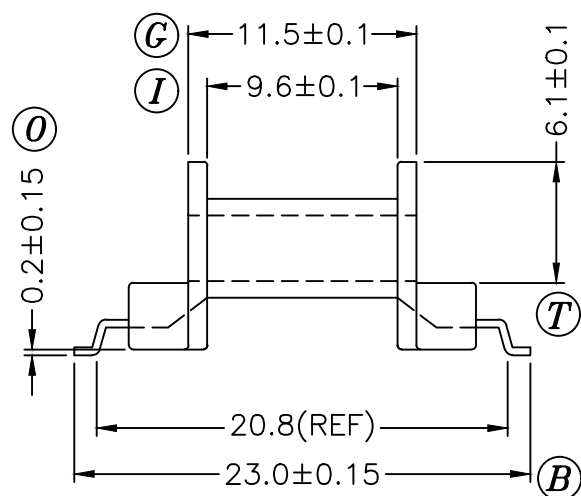


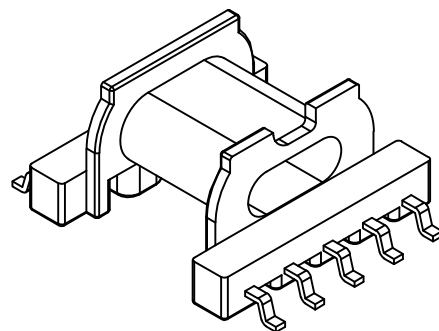

B-051.101P(B-051)

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	PIN TENSION LOAD 1.0KG-->1.5KG; UPDATE DRAWING	'03.04.20	4	將PM 9820材質部分新編標準品	'12.09.18
2	CHANGE MATERIAL : PM9630-->PM9820.		5	更正端子硬度 H-->1/2H.	'20.02.03
3	CORRECTIONS CHANGE THE RECORD:ADDED MATERIAL PM9820.	'10.11.16			

DRAWN & DRAFTED BY	HUNANG JIN YU	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE: SMD BOBBIN EPC-17
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	UNIT: MM	BOBBIN MATERIAL: PHENOLIC PM9630
		COPLANARITY 0.1 MAX	ORIGIN: DG	UL REC. UL 94V-0
				PIN MATERIAL: C5191 1/2H
				PIN TENSION LOAD: 1.5KG MIN.
				DATE: APR.28 '2003
				DRAWING NO. S-1701
				REV. 5

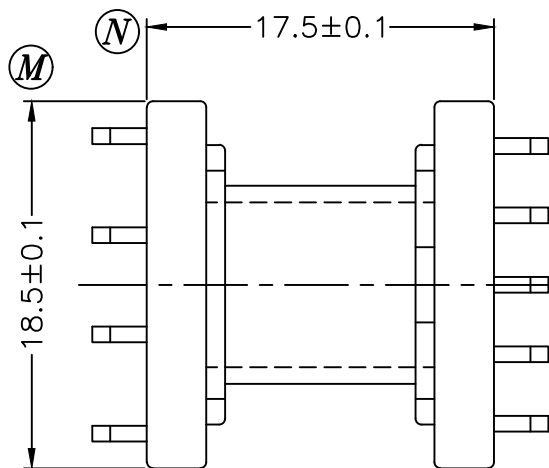

PIN SHINE INDUSTRIAL CO., LTD.
TEL:886-2-22990545 FAX:886-2-22990546