
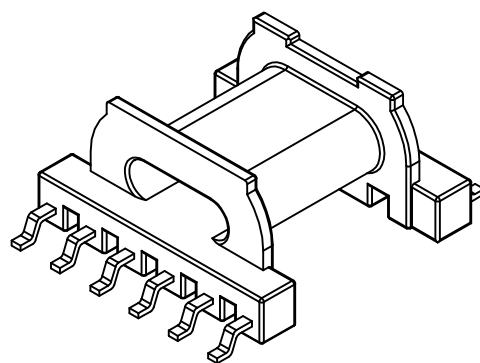
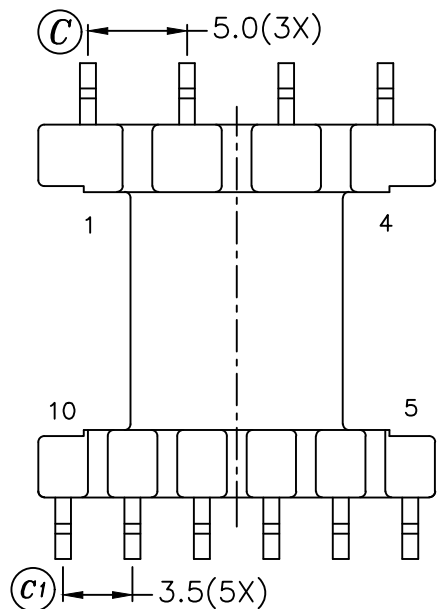
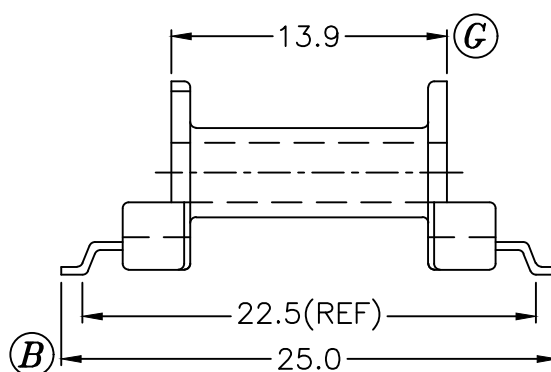
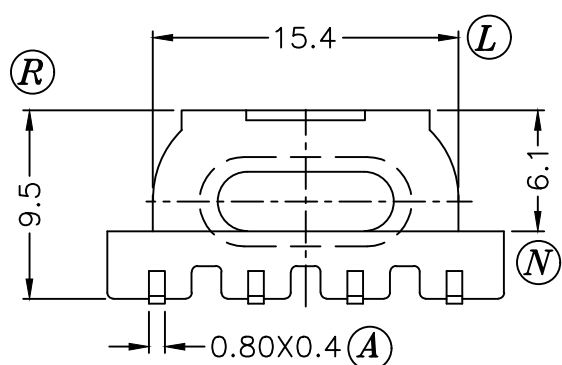
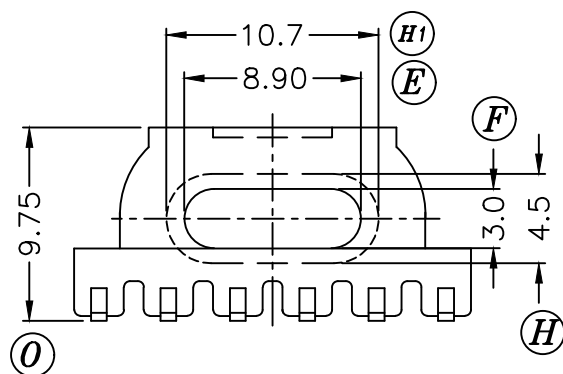


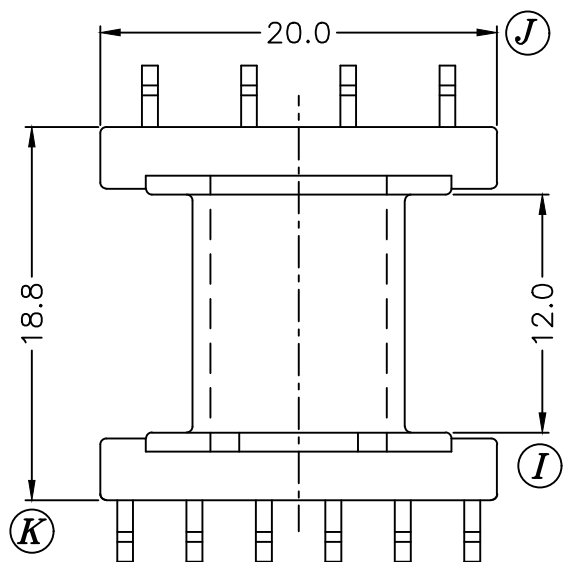

備注：
端子平面度為：0.13MMMAX.

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	CHANGE PIN TENSION LOAD FROM 1.5KG TO 1.0KG MIN			3	(1)CANCEL(Q),ADD(R);		
2	CANCEL (D),(Q); PIN TENSION LOAD 1.0KG->1.5KG;				(2)PIN TENSION LOAD1.5KG-->1.0KG.		
	UPDATE DRAWING			4	增加平面度管控.		2010.4.20

DRAWN & DRAFTED BY	QIN QIUJU	TOLERANCES		ANGLE: $\pm 1^\circ$	TITLE: SMD BOBBIN EPC-19		
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3		UNIT: MM	BOBBIN MATERIAL: PHENOLIC PM9820	UL REC. UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN: DG	PIN MATERIAL: PHOSPHOR BRONZE	PIN TENSION LOAD: 1.0KG MIN	
					DATE: APR.04 '2003	DRAWING NO. S-1901	REV. 4